


Heat Shrink-Insulated Butt Splice Connectors (TL)

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Copper, PE
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	26-22	22-16	16-14	12-10
Spec (JIS AWG)	0.5	1.25	2	5.5
Spec (DIN AWG)	0.5	1	2.5	4.0-6.0
Spec (GB mm ²)	0.1-0.5	0.5-1.5	2.5	6
Max Current	9	19	27	48
Operating Voltage	600V			
Heat Shrinkable Temperature	150°C			
Working Temperature	-40~+105°C			

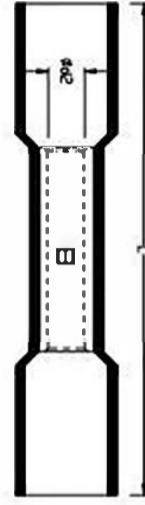

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)				Color	Tool	pcs/pack
			USA	Meri	d2		L				
A.W.G. 26-22 0.2~0.5mm ²	KFBHL10	BHT0.5		0.5	0.059	1.5	1.299	33.0	yellow	OPT SN-02C	1000
A.W.G. 22-16 0.5~1.5mm ²	KFBHL20	BHT1.25		1.25	0.079	2.0	1.339	34.0	red	IZUMI 3#	1000
A.W.G. 16-14 1.5~2.5mm ²	KFBHL30	BHT2		2	0.098	2.5	1.339	34.0	blue	IZUMI 4#	1000
A.W.G. 12-10 4~6mm ²	KFBHL40	BHT5.5		5.5	0.157	4.0	1.575	40.0	yellow	IZUMI 5#	500