


Vinyl-Insulated Butt Splice Connectors (TL)

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	26-22	22-16	16-14	12-10	8	6	4	2
Spec (JIS AWG)	0.5	1.25	2	5.5	8	14	22	38
Spec (DIN AWG)	0.5	1	2.5	4.0-6.0	10	16	25	35
Spec (GB mm ²)	0.1-0.5	0.5-1.5	2.5	6	10	16	25	35
Max Current	9	19	27	48	62	88	115	160
Operating Voltage	600V							
Temperature Withstand	75°C							

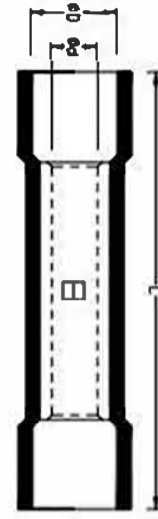

Wire Range	SKU#	MFG#	Dimension(mm)						Color	Tool	pcs/pack
			I	D	L						
A.W.G. 26-22 0.2~0.5mm ²	KFBVL10	BV0.5	0.472	12.0	0.059	1.5	0.866	22.0	yellow	OPT SN-02C	1000
A.W.G. 22-16 0.5~1.5mm ²	KFBVL20	BV1.25	0.591	15.0	0.079	2.0	1.004	25.5	red	IZUMI 3#	1000
A.W.G. 16-14 1.5~2.5mm ²	KFBVL30	BV2	0.591	15.0	0.138	3.5	1.004	25.5	blue	IZUMI 4#	1000
A.W.G. 12-10 4~6mm ²	KFBVL40	BV5.5	0.591	15.0	0.157	4.0	1.004	25.5	yellow	IZUMI 5#	500
A.W.G. 8 8mm ²	KFBVL50	BV8	0.827	21.0	0.197	5.0	1.24	31.5	red	OPT TP-80	250
A.W.G. 6 14mm ²	KFBVL60	BV14	1.024	26.0	0.256	6.5	1.614	41.0	blue	OPT TP-80	200
A.W.G. 4 22mm ²	KFBVL70	BV22	1.142	29.0	0.335	8.5	1.909	48.5	yellow	OPT TP-80	100
A.W.G. 2 38mm ²	KFBVL80	BV38	1.26	32.0	0.394	10.0	2.146	54.5	red	OPT TP-80	50