


Closed End Connectors (Clear)

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1	2	5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	105℃		

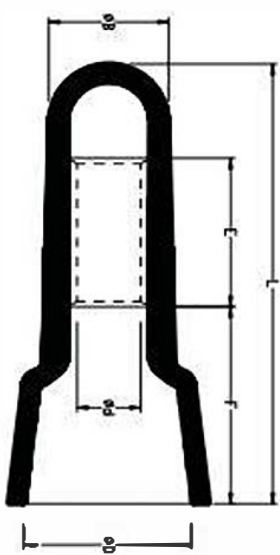

Wire Range	SKU#	MFG#	Dimensions Inch (mm)												Tool	pcs/pack
			L		F		E		Φd		ΦD		ΦB			
A.W.G. 22~16 0.5~1.5mm ²	KFRCW10	CE1	0.827	21.0	0.425	10.8	0.276	7.0	0.098	2.5	0.256	6.5	0.197	5.0	IZUMI 7A	1000
A.W.G. 16~14 1.5~2.5mm ²	KFRCW20	CE2	0.827	21.0	0.335	8.5	0.276	7.0	0.118	3.0	0.315	8.0	0.236	6.0	IZUMI 7A	1000
A.W.G. 12~10 4~6mm ²	KFRCW30	CE5	1.063	27.0	0.531	13.5	0.335	8.5	0.157	4.0	0.374	9.5	0.295	7.5	IZUMI 7A	500