


Closed End Connectors (Colors)

Brand	KF®
Finish/Coating	Tinned
Base Materials	Brass, Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	105°C		

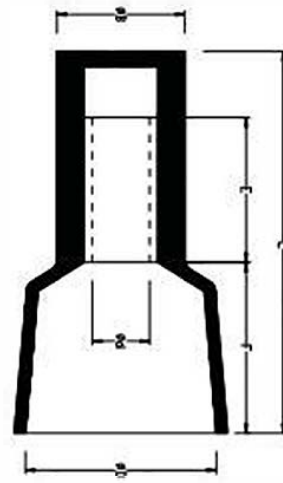

Wire Range	SKU#	MFG#	Dimensions Inch (mm)											Color	Tool	pcs/pack	
			L		F		E		Φd		ΦD		ΦB				
A.W.G. 22~16 0.5~1.5mm²	KFRCC10	CEF1.25	0.591	15.0	0.236	6.0	0.276	7.0	0.098	2.5	0.295	7.5	0.197	5.0	red	IZUMI 7A	1000
A.W.G. 16~14 1.5~2.5mm²	KFRCC20	CEF2	0.709	18.0	0.315	8.0	0.276	7.0	0.118	3.0	0.315	8.0	0.217	5.5	blue	IZUMI 7A	1000
A.W.G. 12~10 4~6mm²	KFRCC30	CEF5.5	0.768	19.5	0.394	10.0	0.315	8.0	0.197	5.0	0.413	10.5	0.335	8.5	yellow	IZUMI 7A	500