


Heat Shrink-Insulated Single Crimp Blade Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PE
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Heat Shrinkable Temperature	150°C		
Working Temperature	-40~+105°C		

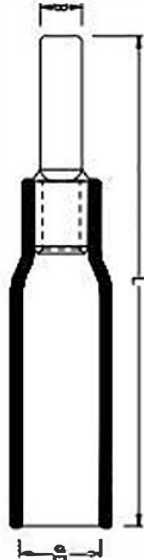

Wire Range	SKU#	MFG#	Dimension(mm)						Color	Tool	pcs/pack	
			B		D		L					T
A.W.G. 22-16 0.5~1.5mm²	KFSH510	DBH1.25-10	0.091	2.3	0.197	5.0	1.26	32.0	0.03 (0.75)	red	IZUMI 3#	1000
	KFSH511	DBH1.25-14	0.087	2.2	0.197	5.0	1.417	36.0				1000
	KFSH512	DBH1.25-18	0.087	2.2	0.197	5.0	1.575	40.0				1000
A.W.G. 16-14 1.5~2.5mm²	KFSH520	DBH2-10	0.112	2.9	0.236	6.0	1.26	32.0	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSH521	DBH2-14	0.094	2.4	0.236	6.0	1.417	36.0				1000
	KFSH522	DBH2-18	0.087	2.2	0.236	6.0	1.575	40.0				1000
A.W.G. 12-10 4~6mm²	KFSH530	DBH5.5-10	0.11	2.8	0.256	6.5	1.299	33.0	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSH531	DBH5.5-14	0.177	4.5	0.256	6.5	1.457	37.0				1000
	KFSH532	DBH5.5-18	0.177	4.5	0.256	6.5	1.614	41.0				500