


Nylon-Insulated Single Crimp Blade Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	105°C		

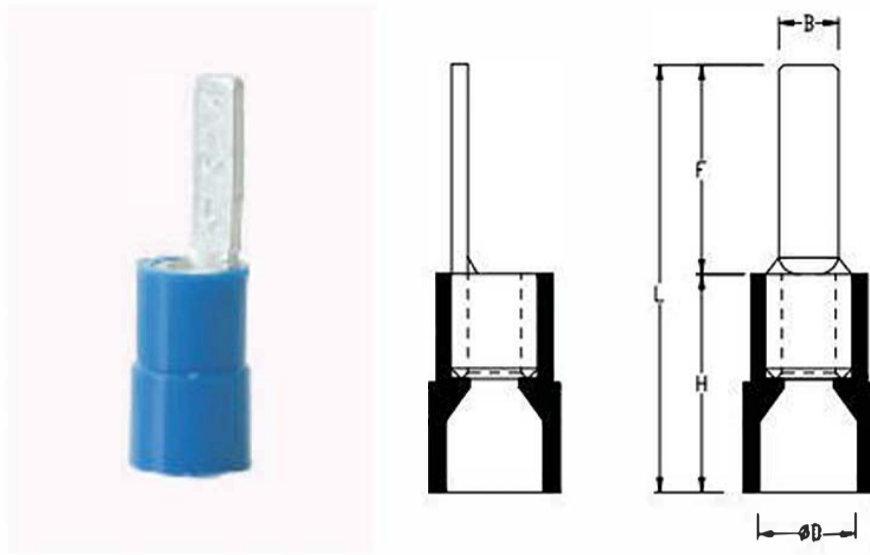

Wire Range	SKU#	MFG#	Dimension(mm)							Color	Tool	pcs/pack		
			B		L		F	H	D				T	
A.W.G. 22-16 0.5~1.5mm²	KFSN510	DBNY1.25-10	0.098	2.5	0.807	20.5	0.394	10.0	0.413 (10.5)	0.157 (4.0)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSN511	DBNY1.25-14	0.079	2.0	0.965	24.5	0.551	14.0						1000
	KFSN512	DBNY1.25-18	0.079	2.0	1.122	28.5	0.709	18.0						1000
A.W.G. 16-14 1.5~2.5mm²	KFSN520	DBNY2-10	0.118	3.0	0.807	20.5	0.394	10.0	0.413 (10.5)	0.177 (4.5)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSN521	DBNY2-14	0.098	2.5	0.965	24.5	0.551	14.0						1000
	KFSN522	DBNY2-18	0.079	2.0	1.122	28.5	0.709	18.0						1000
A.W.G. 12-10 4~6mm²	KFSN530	DBNY5.5-10	0.118	3.0	0.925	23.5	0.394	10.0	0.531 (13.5)	0.276 (7.0)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSN531	DBNY5.5-14	0.177	4.5	1.083	27.5	0.551	14.0						1000
	KFSN532	DBNY5.5-18	0.177	4.5	1.24	31.5	0.709	18.0						500