


Vinyl-Insulated Single Crimp Blade Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	75°C		

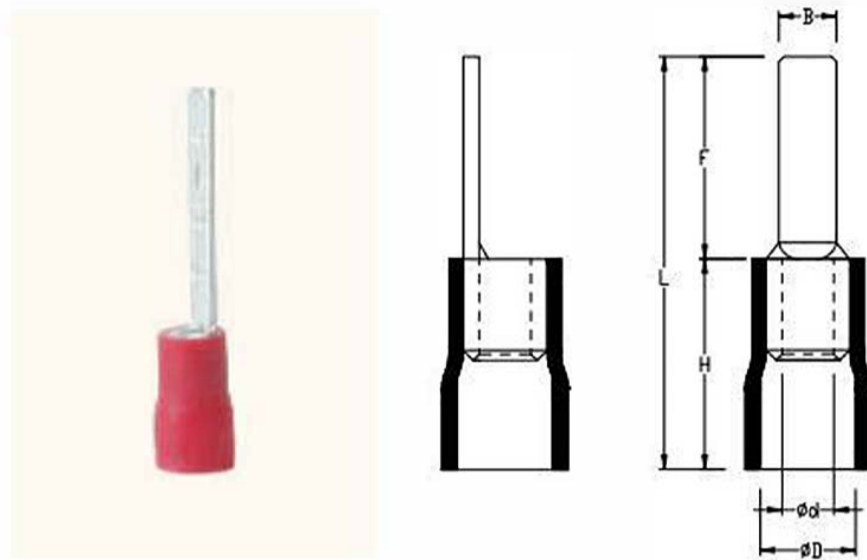

Wire Range	SKU#	MFG#	Dimension(mm)										Color	Tool	pcs/pack	
			B		L		F		H	D	d	T				
A.W.G. 22-16 0.5~1.5mm²	KFSV510	DBV1.25-10	0.098	2.5	0.787	20.0	0.394	10.0						red	IZUMI 3#	1000
	KFSV511	DBV1.25-14	0.079	2.0	0.945	24.0	0.551	14.0	0.394 (10.0)	0.177 (4.5)	0.079 (2.0)	0.03 (0.75)	1000			
	KFSV512	DBV1.25-18	0.079	2.0	1.102	28.0	0.709	18.0					1000			
A.W.G. 16-14 1.5~2.5mm²	KFSV520	DBV2-10	0.118	3.0	0.787	20.0	0.394	10.0					blue	IZUMI 4#	1000	
	KFSV521	DBV2-14	0.098	2.5	0.945	24.0	0.551	14.0	0.394 (10.0)	0.197 (5.0)	0.098 (2.5)	0.031 (0.8)			1000	
	KFSV522	DBV2-18	0.079	2.0	1.102	28.0	0.709	18.0							1000	
A.W.G. 12-10 4~6mm²	KFSV530	DBV5.5-10	0.118	3.0	0.906	23.0	0.394	10.0					yellow	IZUMI 5#	1000	
	KFSV531	DBV5.5-14	0.177	4.5	1.063	27.0	0.551	14.0	0.512 (13.0)	0.256 (6.5)	0.138 (3.5)	0.039 (1.0)			1000	
	KFSV532	DBV5.5-18	0.177	4.5	1.22	31.0	0.709	18.0							500	