


Vinyl-Insulated Single Crimp (Easy Entry) Blade Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	75°C		

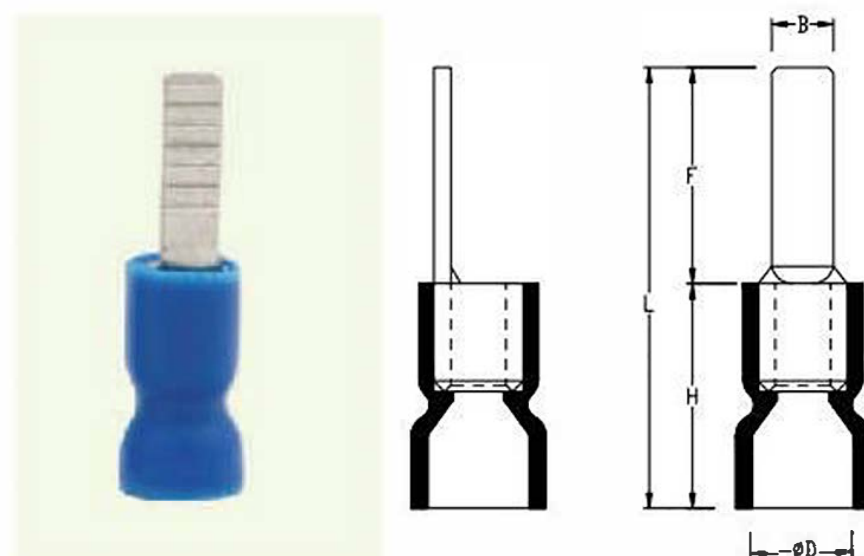

Wire Range	SKU#	MFG#	Dimension(mm)							Color	Tool	pcs/pack		
			B		L		F		H				D	T
A.W.G. 22-16 0.5~1.5mm ²	KFSE610	DBVE1.25-10	0.146	3.7	0.827	21.0	0.394	10.0	0.433 (11.0)	0.157 (4.0)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSE611	DBVE1.25-14	0.169	4.3	0.984	25.0	0.551	14.0						1000
	KFSE612	DBVE1.25-18	0.209	5.3	1.142	29.0	0.709	18.0						1000
A.W.G. 16-14 1.5~2.5mm ²	KFSE620	DBVE2-10	0.146	3.7	0.846	21.5	0.394	10.0	0.453 (11.5)	0.177 (4.5)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSE621	DBVE2-14	0.169	4.3	1.004	25.5	0.551	14.0						1000
	KFSE622	DBVE2-18	0.209	5.3	1.161	29.5	0.709	18.0						1000
A.W.G. 12-10 4~6mm ²	KFSE630	DBVE5.5-10	0.146	3.7	0.945	24.0	0.394	10.0	0.511 (14.0)	0.256 (6.5)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSE631	DBVE5.5-14	0.169	4.3	1.102	28.0	0.551	14.0						1000
	KFSE632	DBVE5.5-18	0.209	5.3	1.26	32.0	0.709	18.0						1000