


Vinyl-Insulated Female Quick Disconnectors

Brand	KF®
Finish/Coating	Tinned
Base Materials	Brass, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	10	15	24
Operating Voltage	600V		
Temperature Withstand	75°C		

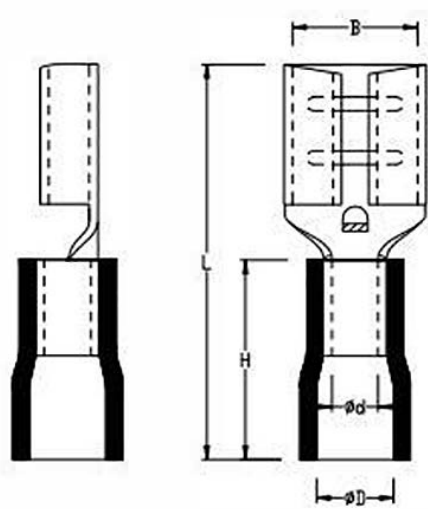

Wire Range	SKU#	MFG#	Dimension(mm)												Color	Tool	pcs/pack
			B		L		D		d		H		T				
A.W.G. 22-16 0.5~1.5mm ²	KFQVF110	FDD1.25-110(5)	0.138	3.5	0.748	19.0	0.138	3.5	0.079	2.0	0.394	10.0	0.014	0.35	red	IZUMI 3#	1000
	KFQVF111	FDD1.25-110(8)	0.138	3.5	0.748	19.0	0.138	3.5	0.079	2.0	0.394	10.0	0.014	0.35			1000
	KFQVF112	FDD1.25-187(5)	0.197	5.0	0.748	19.0	0.138	3.5	0.079	2.0	0.394	10.0	0.014	0.35			1000
	KFQVF113	FDD1.25-110(8)	0.197	5.0	0.748	19.0	0.138	3.5	0.079	2.0	0.394	10.0	0.014	0.35			1000
	KFQVF114	FDD1.25-205	0.217	5.5	0.748	19.0	0.138	3.5	0.079	2.0	0.394	10.0	0.014	0.35			1000
	KFQVF115	FDD1.25-250	0.256	6.5	0.787	20.0	0.138	3.5	0.079	2.0	0.394	10.0	0.016	0.4			1000
	KFQVF116	FDD1.25-312	0.315	8.0	0.925	23.5	0.138	3.5	0.079	2.0	0.394	10.0	0.016	0.4			1000
A.W.G. 16-14 1.5~2.5mm ²	KFQVF120	FDD2-110(5)	0.138	3.5	0.728	18.5	0.177	4.5	0.098	2.5	0.394	10.0	0.014	0.35	blue	IZUMI 4#	1000
	KFQVF121	FDD2-110(8)	0.138	3.5	0.728	18.5	0.177	4.5	0.098	2.5	0.433	11.0	0.014	0.35			1000
	KFQVF122	FDD2-187(5)	0.197	5.0	0.748	19.0	0.177	4.5	0.098	2.5	0.472	12.0	0.014	0.35			1000
	KFQVF123	FDD2-187(8)	0.197	5.0	0.748	19.0	0.177	4.5	0.098	2.5	0.512	13.0	0.014	0.35			1000
	KFQVF124	FDD2-205	0.217	5.5	0.748	19.0	0.177	4.5	0.098	2.5	0.551	14.0	0.014	0.35			1000
	KFQVF125	FDD2-250	0.217	5.5	0.787	20.0	0.177	4.5	0.098	2.5	0.591	15.0	0.016	0.4			1000
	KFQVF126	FDD2-312	0.315	8.0	0.925	23.5	0.177	4.5	0.098	2.5	0.63	16.0	0.016	0.4			1000
A.W.G. 12-10 4~6mm ²	KFQVF130	FDD5.5-250	0.256	6.5	0.906	23.0	0.217	5.5	0.138	3.5	0.512	13.0	0.016	0.4	yellow	IZUMI 5#	1000
	KFQVF131	FDD5.5-312	0.315	8.0	1.043	26.5	0.217	5.5	0.138	3.5	0.512	13.0	0.016	0.4			500
	KFQVF132	FDD5.5-375	0.394	10.0	1.142	29.0	0.217	5.5	0.138	3.5	0.512	13.0	0.02	0.5			500