


Vinyl-Fully Insulated Female Quick Disconnectors

Quick Disconnectors

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Brass, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP

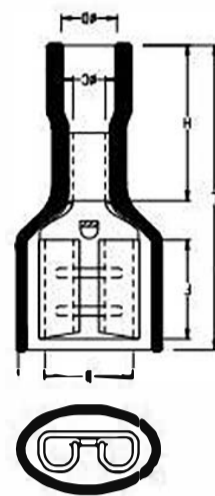

Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm ²)	0.5-1.5	2.5	6
Max Current	10	15	24
Operating Voltage	600V		
Temperature Withstand	75°C		



Wire Range	SKU#	MFG#	Dimension(mm)													Color	Tool	pcs/pack	
			B		L		H		F		d		D		T				
A.W.G. 22-16 0.5~1.5mm ²	KFQVF210	DFD 1.25-110(5)	0.138	3.5	0.827	21.0	0.433	11.0	0.256	6.5	0.079	2.0	0.138	3.5	0.014	0.35	red	IZUMI 3#	1000
	KFQVF211	DFD 1.25-110(8)	0.138	3.5	0.827	21.0	0.433	11.0	0.256	6.5	0.079	2.0	0.138	3.5	0.014	0.35			1000
	KFQVF212	DFD 1.25-187(5)	0.197	5.0	0.768	19.5	0.374	9.5	0.256	6.5	0.079	2.0	0.138	3.5	0.014	0.35			1000
	KFQVF213	DFD 1.25-187(8)	0.197	5.0	0.768	19.5	0.374	9.5	0.256	6.5	0.079	2.0	0.138	3.5	0.014	0.35			1000
	KFQVF214	DFD 1.25-250	0.256	6.5	0.866	22.0	0.335	8.5	0.295	7.5	0.079	2.0	0.138	3.5	0.016	0.4			1000
A.W.G. 16-14 1.5~2.5mm ²	KFQVF220	DFD 2-187(5)	0.197	5.0	0.827	21.0	0.433	11.0	0.256	6.5	0.098	2.5	0.177	4.5	0.014	0.35	blue	IZUMI 4#	1000
	KFQVF221	DFD 2-187(8)	0.197	5.0	0.827	21.0	0.433	11.0	0.256	6.5	0.098	2.5	0.177	4.5	0.014	0.35			1000
	KFQVF222	DFD 2-250	0.256	6.5	0.886	22.5	0.453	11.5	0.295	7.5	0.098	2.5	0.177	4.5	0.016	0.4			1000
A.W.G. 12-10 4~6mm ²	KFQVF230	DFD 5.5-250	0.256	6.5	0.906	23.0	0.472	12.0	0.295	7.5	0.138	3.5	0.217	5.5	0.016	0.4	yellow	IZUMI 5#	500