


Heat Shrink-Fully Insulated Female Quick Disconnectors

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Brass, PE
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm ²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Heat Shrinkable Temperature	150°C		
Working Temperature	-40~+105°C		

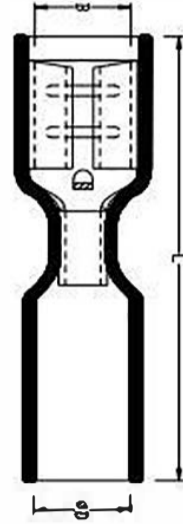

Wire Range	SKU#	MFG#	Dimension(mm)								Color	Tool	pcs/pack
			B		D		L		T				
A.W.G. 22-16 0.5~1.5mm ²	KFQHBF10	PDFH 1.25-110(5)	0.138	3.5	0.276	7.0	1.102	28.0	0.012	0.3	red	IZUMI 3#	1000
	KFQHBF11	PDFH 1.25-110(8)	0.138	3.5	0.276	7.0	1.102	28.0	0.012	0.3			1000
	KFQHBF12	PDFH 1.25-187(5)	0.197	5.0	0.276	7.0	1.102	28.0	0.014	0.35			1000
	KFQHBF13	PDFH 1.25-187(8)	0.197	5.0	0.276	7.0	1.102	28.0	0.014	0.35			1000
	KFQHBF14	PDFH 1.25-250	0.256	6.5	0.276	7.0	1.102	28.0	0.016	0.4			1000
A.W.G. 16-14 1.5~2.5mm ²	KFQHBF20	PDFH 2-187(5)	0.197	5.0	0.276	7.0	1.102	28.0	0.014	0.35	blue	IZUMI 4#	1000
	KFQHBF21	PDFH 2-187(8)	0.197	5.0	0.276	7.0	1.102	28.0	0.014	0.35			1000
	KFQHBF22	PDFH 2-250	0.256	6.5	0.276	7.0	1.102	28.0	0.016	0.4			1000
A.W.G. 12-10 4~6mm ²	KFQHBF30	PDFH 5.5-250	0.256	6.5	0.276	7.0	1.181	30.0	0.016	0.4	yellow	IZUMI 5#	500