


## Heat Shrink-Insulated Female Quick Disconnectors

Brand	KF <sup>®</sup>
Finish/Coating	Tinned
Base Materials	Brass, PE
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm <sup>2</sup> )	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Heat Shrinkable Temperature	150°C		
Working Temperature	-40~+105°C		

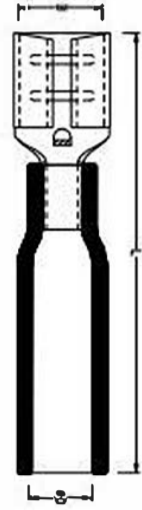

Wire Range	SKU#	MFG#	Dimension(mm)								Color	Tool	pcs/pack
			B		L		D		T				
A.W.G. 22-16 0.5~1.5mm <sup>2</sup>	KFQHF10	FDH 1.25-110(5)	0.138	3.5	1.22	31.0	0.197	5.0	0.014	0.35	red	IZUMI 3#	1000
	KFQHF11	FDH 1.25-187(5)	0.197	5.0	1.22	31.0	0.197	5.0	0.014	0.35			1000
	KFQHF12	FDH 1.25-250	0.256	6.5	1.26	32.0	0.197	5.0	0.016	0.40			1000
A.W.G. 16-14 1.5~2.5mm <sup>2</sup>	KFQHF20	FDH 2-187(5)	0.197	5.0	1.22	31.0	0.236	6.0	0.014	0.35	blue	IZUMI 4#	1000
	KFQHF21	FDH 2-250	0.256	6.5	1.26	32.0	0.236	6.0	0.016	0.40			1000
A.W.G. 12-10 4~6mm <sup>2</sup>	KFQHF30	FDH 5.5-250	0.256	6.5	1.299	33.0	0.256	6.5	0.016	0.40	yellow	IZUMI 5#	1000
	KFQHF31	FDH 5.5-375	0.394	10.0	1.535	39.0	0.256	6.5	0.02	0.50			500