


## Nylon-Fully Insulated Bullet Female Quick Disconnectors

Brand	KF <sup>®</sup>
Finish/Coating	Tinned
Base Materials	Brass, Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14
Spec (JIS AWG)	1.25	2
Spec (DIN AWG)	1	2.5
Spec (GB mm <sup>2</sup> )	0.5-1.5	2.5
Max Current	10	15
Operating Voltage	600V	
Temperature Withstand	105°C	

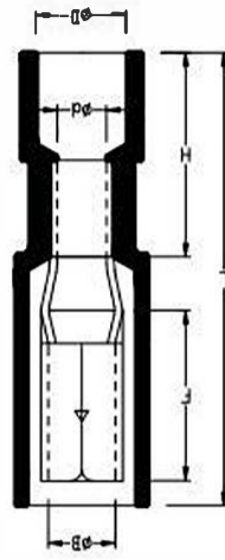

Wire Range	SKU#	MFG#	Dimension(mm)														Color	Tool	pcs/pack
			B		D		d		L		F		H		T				
A.W.G. 22-16 0.5~1.5mm <sup>2</sup>	KFQNB310	FRFNY 1.25-156	0.157	4.0	0.157	4.0	0.079	2.0	0.945	24.0	0.354	9.0	0.413	10.5	0.016	0.4	red	IZUMI 3#	500
A.W.G. 16-14 1.5~2.5mm <sup>2</sup>	KFQNB320	FRFNY 2-156	0.157	4.0	0.197	5.0	0.098	2.5	0.945	24.0	0.354	9.0	0.413	10.5	0.016	0.4	blue	IZUMI 4#	500