


Heat Shrink-Insulated Single Crimp Hook Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PE
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Heat Shrinkable Temperature	150°C		
Working Temperature	-40~+105°C		

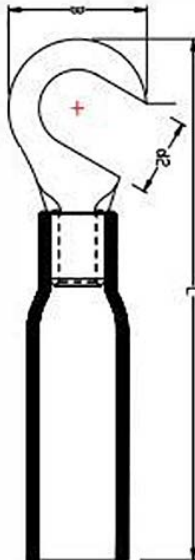

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)						Color	Tool	pcs/pack	
			USA	Meriç	d2		B		L					T
A.W.G. 22–16 0.5~1.5mm²	KFSH710	HH1.25–3.5	#6	3.5	0.146	3.7	0.315	8.0	1.299	33.0	0.03 (0.75)	red	IZUMI 3#	1000
	KFSH711	HH1.25–4	#8	4	0.169	4.3	0.315	8.0	1.299	33.0				1000
	KFSH712	HH1.25–5	#10	5	0.209	5.3	0.315	8.0	1.299	33.0				1000
	KFSH713	HH1.25–6	1/4"	6	0.252	6.4	0.453	11.5	1.535	39.0				1000
A.W.G. 16–14 1.5~2.5mm²	KFSH720	HH2–3.5	#6	3.5	0.146	3.7	0.335	8.5	1.339	34.0	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSH721	HH2–4	#8	4	0.169	4.3	0.335	8.5	1.339	34.0				1000
	KFSH722	HH2–5	#10	5	0.209	5.3	0.374	9.5	1.339	34.0				1000
	KFSH723	HH2–6	1/4"	6	0.252	6.4	0.472	12.0	1.535	39.0				1000
A.W.G. 12–10 4~6mm²	KFSH730	HH5.5–3.5	#6	3.5	0.146	3.7	0.276	7.0	1.28	32.5	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSH731	HH5.5–4	#8	4	0.169	4.3	0.374	9.5	1.417	36.0				1000
	KFSH732	HH5.5–5	#10	5	0.209	5.3	0.374	9.5	1.417	36.0				1000
	KFSH733	HH5.5–6	1/4"	6	0.252	6.4	0.472	12.0	1.555	39.5				500