


Vinyl-Insulated Single Crimp (Easy Entry) Hook Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	75°C		

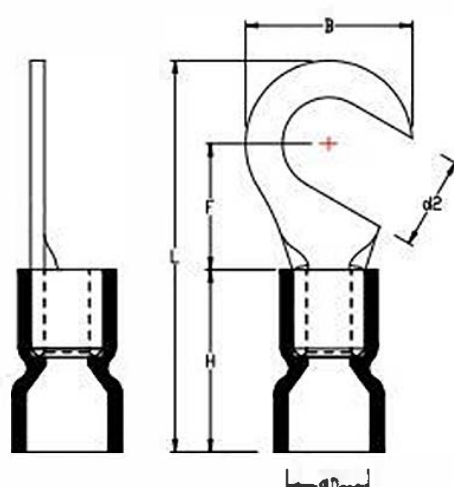

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)								Color	Tool	pcs/pack			
			USA	Meric	d2		B		L		F					H	D	T
A.W.G. 22-16 0.5~1.5mm²	KFSE810	HVE1.25-3.5	#6	3.5	0.169	3.7	0.3	8.0	0.866	22.0	0.276	7.0	0.433 (11.0)	0.157 (4.0)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSE811	HVE1.25-4	#8	4	0.209	4.3	0.3	8.0	0.866	22.0	0.276	7.0						1000
	KFSE812	HVE1.25-5	#10	5	0.252	5.3	0.3	8.0	0.866	22.0	0.276	7.0						1000
	KFSE813	HVE1.25-6	1/4"	6	0.146	6.4	0.5	11.5	1.102	28.0	0.433	11.0						1000
A.W.G. 16-14 1.5~2.5mm²	KFSE820	HVE2-3.5	#6	4	0.169	3.7	0.3	8.5	0.925	23.5	0.315	8.0	0.453 (11.5)	0.177 (4.5)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSE821	HVE2-4	#8	4	0.209	4.3	0.3	8.5	0.925	23.5	0.315	8.0						1000
	KFSE822	HVE2-5	#10	5	0.252	5.3	0.4	9.5	0.925	23.5	0.295	7.5						1000
	KFSE823	HVE2-6	1/4"	6	0.146	6.4	0.5	12.0	1.122	28.5	0.433	11.0						1000
A.W.G. 12-10 4~6mm²	KFSE830	HVE5.5-3.5	#6	4	0.169	3.7	0.3	7.0	0.925	23.5	0.236	6.0	0.511 (14.0)	0.256 (6.5)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSE831	HVE5.5-4	#8	4	0.209	s	0.4	9.5	1.063	27.0	0.315	8.0						1000
	KFSE832	HVE5.5-5	#10	5	0.252	5.3	0.4	9.5	1.063	27.0	0.315	8.0						1000
	KFSE833	HVE5.5-6	1/4"	6	0.252	6.4	0.5	12.0	1.201	30.5	0.413	10.5						1000