


Quick Splice Connectors (L)

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PP
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-18	18-14	12-10/18-14
Spec (JIS AWG)			
Spec (DIN AWG)			
Spec (GB mm²)			
Max Current			
Operating Voltage	600V		
Temperature Withstand	105°C		

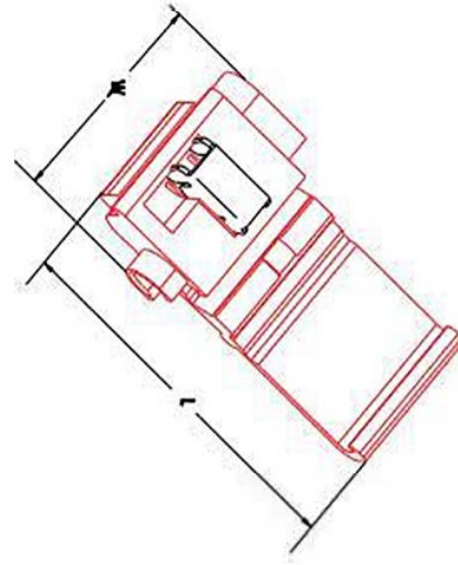

Wire Range	SKU#	MFG#	Dimensions Inch (mm)						Color	pcs/pack
			W		L		T			
A.W.G. 22~18 0.5~1mm²	KFRQ210	KF-W1	0.768	19.5	1.299	33.0	0.02	0.5	red	500
A.W.G. 18~14 1~2.5mm²	KFRQ220	KF-W2	0.768	19.5	1.299	33.0	0.02	0.5	blue	500
A.W.G. 12~10/18~14 4~6/0.75~2.5mm²	KFRQ230	KF-W521	0.827	21.0	1.378	35.0	0.028	0.7	Brown	200