


QuickSplice Connectors (U)

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PP
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-18	18-14	12-10
Spec (JIS AWG)			
Spec (DIN AWG)			
Spec (GB mm²)			
Max Current			
Operating Voltage	600V		
Temperature Withstand	105°C		

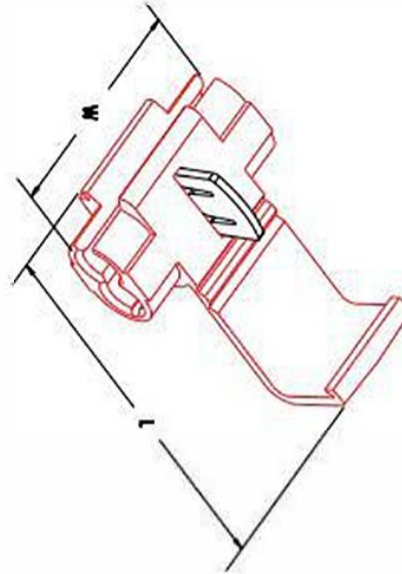

Wire Range	SKU#	MFG#	Dimensions Inch (mm)						Color	pcs/pack
			W		L		T			
A.W.G. 22~18 0.5~1mm²	KFRQ10	KF1	0.768	19.5	1.063	27.0	0.031	0.8	red	500
A.W.G. 18~14 1~2.5mm²	KFRQ20	KF2	0.768	19.5	1.063	27.0	0.031	0.8	blue	500
A.W.G. 18~14 1~2.5mm²	KFRQ21	KF2W	0.768	19.5	1.063	27.0	0.031	0.8	White	500
A.W.G. 12~10 4~6mm²	KFRQ30	KF5	0.787	20.0	1.378	35.0	0.031	0.8	yellow	200