


Vinyl-Insulated Single Crimp Locking Spade Terminals

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm ²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	75°C		

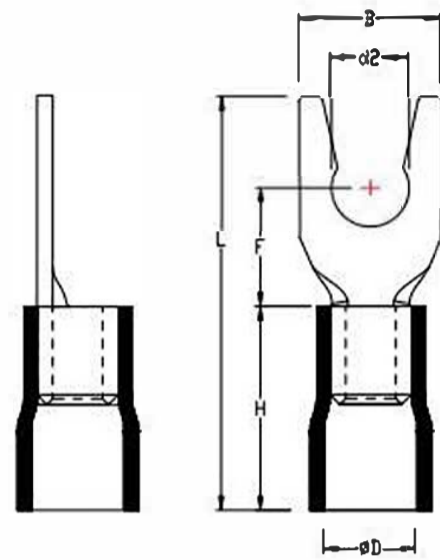

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)								Color	Tool	pcs/pack			
			USA	MeriC	d2	B	L	F	H	D	T							
A.W.G. 22-16 0.5~1.5mm ²	KFSV310	LSV1.25-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.827	21.0	0.256	6.5	0.394 (10.0)	0.177 (4.5)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSV311	LSVM1.25-4	#8	4	0.169	4.3	0.276	7.0	0.827	21.0	0.256	6.5						1000
	KFSV312	LSVL1.25-4	#8	4	0.169	4.3	0.315	8.0	0.827	21.0	0.256	6.5						1000
	KFSV313	LSVS1.25-5	#10	5	0.209	5.3	0.315	8.0	0.827	21.0	0.256	6.5						1000
	KFSV314	LSVL1.25-5	#10	5	0.209	5.3	0.374	9.5	0.827	21.0	0.256	6.5						1000
A.W.G. 16-14 1.5~2.5mm ²	KFSV320	LSV2-3.5	#6	3.5	0.146	3.7	0.236	6.0	0.827	21.0	0.256	6.5	0.394 (10.0)	0.197 (5.0)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSV321	LSVM2-4	#8	4	0.169	4.3	0.276	7.0	0.827	21.0	0.256	6.5						1000
	KFSV322	LSVL2-4	#8	4	0.169	4.3	0.315	8.0	0.827	21.0	0.256	6.5						1000
	KFSV323	LSVS2-5	#10	5	0.209	5.3	0.315	8.0	0.827	21.0	0.256	6.5						1000
	KFSV324	LSVL2-5	#10	5	0.209	5.3	0.374	9.5	0.827	21.0	0.256	6.5						1000
A.W.G. 12-10 4~6mm ²	KFSV330	LSV5.5-3.5	#6	3.5	0.146	3.7	0.335	8.5	1.004	25.5	0.295	7.5	0.512 (13.0)	0.256 (6.5)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSV331	LSV5.5-4	#8	4	0.169	4.3	0.335	8.5	1.004	25.5	0.295	7.5						1000
	KFSV332	LSV5.5-5	#10	5	0.209	5.3	0.354	9.0	1.004	25.5	0.295	7.5						1000
	KFSV333	LSV5.5-6	1/4"	6	0.252	6.4	0.472	12.0	1.24	31.5	0.472	12.0						1000