


Vinyl-Insulated Male Quick Disconnectors

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Brass, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm ²)	0.5-1.5	2.5	6
Max Current	10	15	24
Operating Voltage	600V		
Temperature Withstand	75°C		

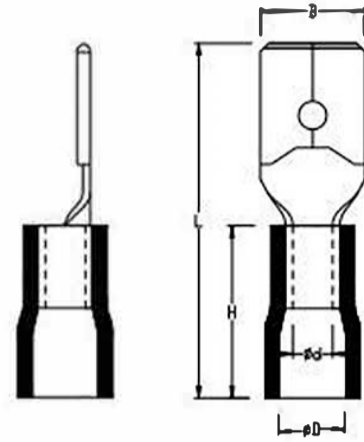

Wire Range	SKU#	MFG#	Dimension(mm)												Color	Tool	pcs/pack
			B		d	D		L		H		T					
A.W.G. 22-16 0.5~1.5mm ²	KFQVM10	MDD 1.25-110(5)	0.11	2.8	0.079	2.0	0.138	3.5	0.748	19.0	0.394	10.0	0.02	0.5	red	IZUMI 3#	1000
	KFQVM11	MDD 1.25-110(8)	0.11	2.8	0.079	2.0	0.177	4.5	0.748	19.0	0.394	10.0	0.031	0.8			1000
	KFQVM12	MDD 1.25-187(5)	0.187	4.8	0.079	2.0	0.138	3.5	0.787	20.0	0.394	10.0	0.02	0.5			1000
	KFQVM13	MDD 1.25-110(8)	0.187	4.8	0.079	2.0	0.177	4.5	0.787	20.0	0.394	10.0	0.031	0.8			1000
	KFQVM14	MDD 1.25-250	0.25	6.4	0.079	2.0	0.157	4.0	0.827	21.0	0.394	10.0	0.031	0.8			1000
A.W.G. 16-14 1.5~2.5mm ²	KFQVM20	MDD 2-187(5)	0.187	4.8	0.098	2.5	0.177	4.5	0.787	20.0	0.394	10.0	0.02	0.5	blue	IZUMI 4#	1000
	KFQVM21	MDD 2-187(8)	0.187	4.8	0.098	2.5	0.197	5.0	0.787	20.0	0.394	10.0	0.031	0.8			1000
	KFQVM22	MDD 2-250	0.25	6.4	0.098	2.5	0.177	4.5	0.827	21.0	0.394	10.0	0.031	0.8			1000
A.W.G. 12-10 4~6mm ²	KFQVM30	MDD 5.5-250	0.25	6.4	0.138	3.5	0.217	5.5	0.945	24.0	0.512	13.0	0.031	0.8	yellow	IZUMI 5#	500