


## Heat Shrink-Insulated Male Quick Disconnectors

Quick Disconnectors

Brand	KF <sup>®</sup>
Finish/Coating	Tinned
Base Materials	Brass, PE
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP

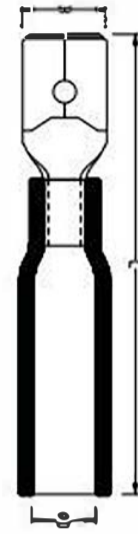

Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm <sup>2</sup> )	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Heat Shrinkable Temperature	150°C		
Working Temperature	-40~+105°C		



Wire Range	SKU#	MFG#	Dimension(mm)								Color	Tool	pcs/pack
			B		L		D		T				
A.W.G. 22-16 0.5~1.5mm <sup>2</sup>	KFQHF10	MDH 1.25-110(5)	0.112	2.9	1.22	31.0	0.197	5.0	0.02	0.5	red	IZUMI 3#	1000
	KFQHF11	MDH 1.25-110(8)	0.112	2.9	1.22	31.0	0.197	5.0	0.031	0.8			1000
	KFQHF12	MDH 1.25-187(5)	0.187	4.8	1.26	32.0	0.197	5.0	0.02	0.5			1000
	KFQHF13	MDH 1.25-187(8)	0.187	4.8	1.26	32.0	0.197	5.0	0.031	0.8			1000
	KFQHF14	MDH 1.25-250	0.25	6.4	1.299	33.0	0.197	5.0	0.031	0.8			1000
A.W.G. 16-14 1.5~2.5mm <sup>2</sup>	KFQHF20	MDH 2-187(5)	0.187	4.8	1.26	32.0	0.236	6.0	0.02	0.5	blue	IZUMI 4#	1000
	KFQHF21	MDH 2-187(8)	0.187	4.8	1.26	32.0	0.236	6.0	0.031	0.8			1000
	KFQHF22	MDH 2-250	0.25	6.4	1.299	33.0	0.236	6.0	0.031	0.8			1000
A.W.G. 12-10 4~6mm <sup>2</sup>	KFQHF30	MDH 5.5-250	0.25	6.4	1.339	34.0	0.256	6.5	0.031	0.8	yellow	IZUMI 5#	500