


Nylon-Insulated Male Quick Disconnectors

Brand	KF®
Finish/Coating	Tinned
Base Materials	Brass, Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	10	15	24
Operating Voltage	600V		
Temperature Withstand	105℃		

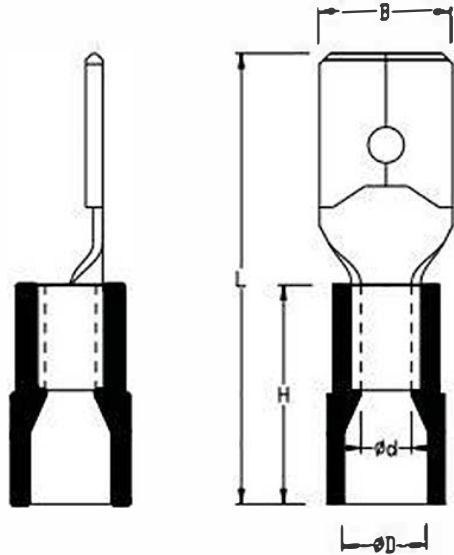

Wire Range	SKU#	MFG#	Dimension(mm)												Color	Tool	pcs/pack
			B		L		d		D		H		T				
A.W.G. 22-16 0.5~1.5mm ²	KFQNM110	MDNY 1.25-110(5)	0.11	2.8	0.768	19.5	0.079	2.0	0.157	4.0	0.394	10.0	0.02	0.5	red	IZUMI 3#	1000
	KFQNM111	MDNY 1.25-110(8)	0.11	2.8	0.768	19.5	0.079	2.0	0.157	4.0	0.394	10.0	0.031	0.8			1000
	KFQNM112	MDNY 1.25-187(5)	0.187	4.8	0.807	20.5	0.079	2.0	0.157	4.0	0.394	10.0	0.02	0.5			1000
	KFQNM113	MDNY 1.25-110(8)	0.187	4.8	0.807	20.5	0.079	2.0	0.157	4.0	0.394	10.0	0.031	0.8			1000
	KFQNM114	MDNY 1.25-250	0.25	6.4	0.846	21.5	0.079	2.0	0.157	4.0	0.394	10.0	0.031	0.8			1000
A.W.G. 16-14 1.5~2.5mm ²	KFQNM120	MDNY 2-187(5)	0.187	4.8	0.807	20.5	0.098	2.5	0.177	4.5	0.413	10.5	0.02	0.5	blue	IZUMI 4#	1000
	KFQNM121	MDNY 2-187(8)	0.187	4.8	0.807	20.5	0.098	2.5	0.177	4.5	0.413	10.5	0.031	0.8			1000
	KFQNM122	MDNY 2-250	0.25	6.4	0.846	21.5	0.098	2.5	0.177	4.5	0.413	10.5	0.031	0.8			1000
A.W.G. 12-10 4~6mm ²	KFQNM130	MDNY 5.5-250	0.25	6.4	0.965	24.5	0.138	3.5	0.276	7.0	0.531	13.5	0.031	0.8	yellow	IZUMI 5#	500