


Nylon-Insulated Bullet Male Quick Disconnectors

Quick Disconnectors

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Brass, Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP

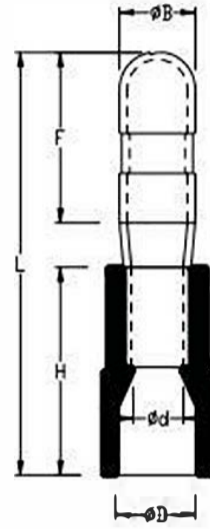

Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm ²)	0.5-1.5	2.5	6
Max Current	10	15	24
Operating Voltage	600V		
Temperature Withstand	105°C		



Wire Range	SKU#	MFG#	Dimension(mm)														Color	Tool	pcs/pack
			b		f		d		D		H		L		T				
A.W.G. 22-16 0.5~1.5mm ²	KFQNB210	MPNY 1.25-156	0.157	4.0	0.335	8.5	0.079	2.0	0.138	3.5	0.413	10.5	0.846	21.5	0.016	0.4	red	IZUMI 3#	1000
A.W.G. 16-14 1.5~2.5mm ²	KFQNB220	MPNY 2-156	0.157	4.0	0.335	8.5	0.098	2.5	0.177	4.5	0.413	10.5	0.846	21.5	0.016	0.4	blue	IZUMI 4#	1000
	KFQNB221	MPNY 2-195	0.197	5.0	0.335	8.5	0.098	2.5	0.177	4.5	0.413	10.5	0.846	21.5	0.016	0.4			1000
A.W.G. 12-10 4~6mm ²	KFQNB230	MPNY 5.5-195	0.197	5.0	0.335	8.5	0.138	3.5	0.217	5.5	0.531	13.5	0.965	24.5	0.016	0.4	yellow	IZUMI 5#	1000