


Nylon-Insulated Single Crimp Dual Screw Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper , Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	105℃		

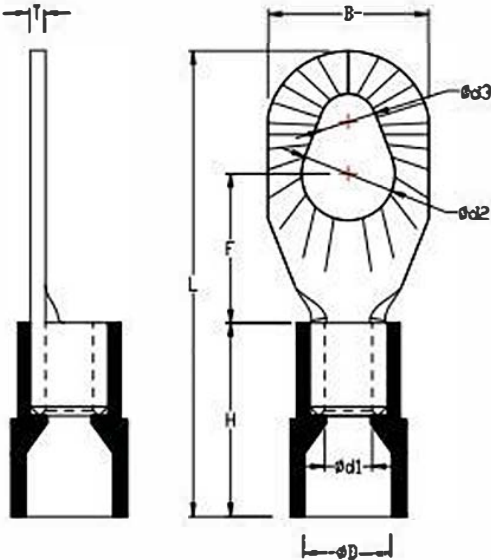

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)														Color	Tool	pcs/pack
			USA	Meri	d2	d3				B		L	F		H	D	d1	T			
A.W.G. 22-16 0.5~1.5mm²	KFSN810	MSRNY1.25-2237	#6	22.0	0.146	3.7	0.087	2.2	0.276	7.0	0.886	22.5	0.276	7.0					red	IZUMI 3#	1000
	KFSN811	MSRNY1.25-3753	#10	37.0	0.209	5.3	0.146	3.7	0.335	8.5	0.984	25.0	0.315	8.0	0.413 (10.5)	0.157 (4.0)	0.079 (2.0)	0.03 (0.75)			1000
A.W.G. 16-14 1.5~2.5mm²	KFSN820	MSRNY2-2237	#6	22.0	0.146	3.7	0.087	2.2	0.276	7.0	0.886	22.5	0.276	7.0					blue	IZUMI 4#	1000
	KFSN821	MSRNY2-3753	#10	37.0	0.209	5.3	0.146	3.7	0.335	8.5	0.984	25.0	0.315	8.0	0.413 (10.5)	0.177 (4.5)	0.098 (2.5)	0.031 (0.8)			1000
A.W.G. 12-10 4~6mm²	KFSN830	MSRNY5.5-3753	#10	37.0	0.209	5.3	0.146	3.7	0.394	10.0	1.142	29.0	0.354	9.0	0.531 (13.5)	0.276 (7.0)	0.138 (3.5)	0.039 (1.0)	yellow	IZUMI 5#	1000