


Vinyl-Insulated Single Crimp Dual Screw Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	75°C		

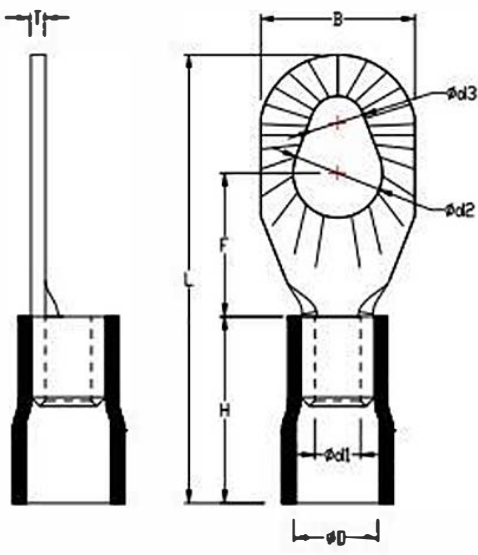

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)														Color	Tool	pcs/pack
			USA	Meri	d2		d3		B		L		F		H	D	d1	T			
A.W.G. 22-16 0.5~1.5mm ²	KFSV810	MSRV1.25-2237	#6	3.5	0.146	3.7	0.087	2.2	0.276	7.0	0.866	22.0	0.276	7.0					red	IZUMI 3#	1000
	KFSV811	MSRV1.25-3753	#10	5	0.209	5.3	0.146	3.7	0.335	8.5	0.965	24.5	0.315	8.0	0.394 (10.0)	0.177 (4.5)	0.079 (2.0)	0.03 (0.75)			1000
A.W.G. 16-14 1.5~2.5mm ²	KFSV820	MSRV2-2237	#6	3.5	0.146	3.7	0.087	2.2	0.276	7.0	0.866	22.0	0.276	7.0					blue	IZUMI 4#	1000
	KFSV821	MSRV2-3753	#10	5	0.209	5.3	0.146	3.7	0.335	8.5	0.965	24.5	0.315	8.0	0.394 (10.0)	0.197 (5.0)	0.098 (2.5)	0.031 (0.8)			1000
A.W.G. 12-10 4~6mm ²	KFSV830	MSRV5.5-3753	#10	5	0.209	5.3	0.146	3.7	0.394	10.0	1.122	28.5	0.354	9.0	0.512 (13.0)	0.256 (6.5)	0.138 (3.5)	0.039 (1.0)	yellow	IZUMI 5#	1000