


## Non-Insulated Pin Terminals

Brand	KF <sup>®</sup>
Finish/Coating	Tinned
Base Materials	Copper
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec(American AWG)	26-22	22-16	16-14	14-12	12-10	8
Spec(JIS AWG)	0.5	1.25	2	3.5	5.5	8
Spec(DIN AWG)	0.5	1	2.5		4.0-6.0	10
Spec(GB mm <sup>2</sup> )	0.1-0.5	0.5-1.5	2.5	4	6.0	10
Max Current		19	27	37	48.0	62

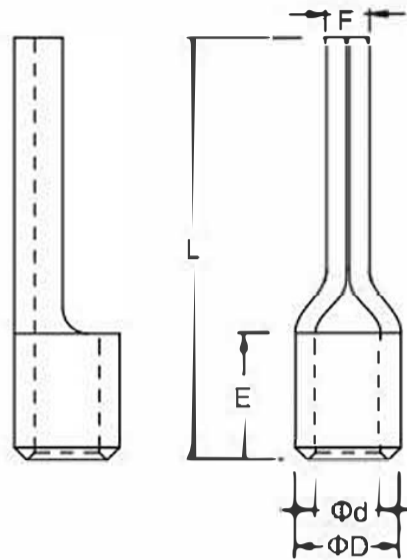

Wire Range	SKU#	MFG#	Dimension(mm)								Tool	pcs/pack
			L		F		E	D	d	T		
A.W.G. 26-22 0.2~0.5mm <sup>2</sup>	KFO0400	PTN0.5-9	0.709	18.0	0.055	1.4		0.087 (2.2)		0.02 (0.5)	IZUMI 5N18	1000
	KFO0410	PTN1.25-10	0.591	15.0	0.079	2.0						1000
A.W.G. 22-16 0.5~1.5mm <sup>2</sup>	KFO0411	PTN1.25-12	0.669	17.0	0.079	2.0	0.197 (5.0)	0.138 (3.5)	0.079 (2.0)	0.03 (0.75)	IZUMI 5N18	1000
	KFO0412	PTN1.25-18	0.906	23.0	0.079	2.0						1000
A.W.G. 16-14 1.5~2.5mm <sup>2</sup>	KFO0420	PTN2-10	0.591	15.0	0.079	2.0					IZUMI 5N18	1000
	KFO0421	PTN2-12	0.669	17.0	0.079	2.0	0.197 (5.0)	0.157 (4.0)	0.098 (2.5)	0.031 (0.8)		1000
	KFO0422	PTN2-18	0.906	23.0	0.079	2.0						1000
A.W.G. 14-12 2.5~4mm <sup>2</sup>	KFO0430	PTN3.5-10	0.65	16.5	0.118	3.0	0.256 (6.5)	0.197 (5.0)	0.118 (3.0)	0.039 (1.0)	IZUMI 5N18	1000
	KFO0431	PTN3.5-13	0.768	19.5	0.118	3.0						1000
A.W.G. 12-10 4~6mm <sup>2</sup>	KFO0440	PTN5.5-13	0.787	20.0	0.118	3.0	0.276 (7.0)	0.217 (5.5)	0.138 (3.5)	0.039 (1.0)	IZUMI 5N18	1000
	KFO0441	PTN5.5-18	0.984	25.0	0.118	3.0						1000