


Nylon-Insulated Single Crimp Pin Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, Nylon
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	14-12	12-10
Spec (JIS AWG)	1.25	2	3.5	5.5
Spec (DIN AWG)	1	2.5		4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	4	6
Max Current	19	27	37	48
Operating Voltage	600V			
Temperature Withstand	105℃			

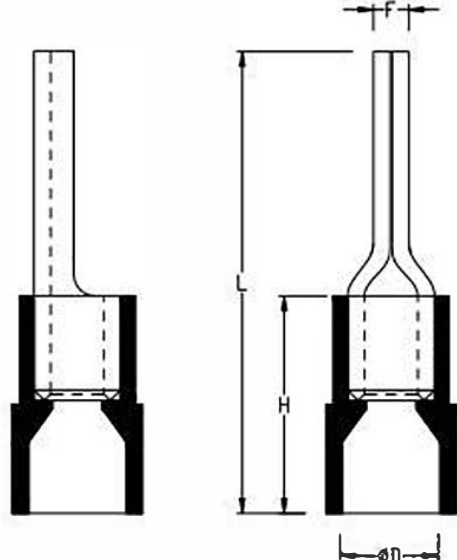

Wire Range	SKU#	MFG#	Dimension(mm)							Color	Tool	pcs/pack
			F		L		H	D	T			
A.W.G. 22-16 0.5~1.5mm²	KFSN410	PTNY1.25-10	0.079	2.0	0.807	20.5	0.413 (10.5)	0.157 (4.0)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSN411	PTNY1.25-12	0.079	2.0	0.886	22.5						1000
	KFSN412	PTNY1.25-18	0.079	2.0	1.122	28.5						1000
A.W.G. 16-14 1.5~2.5mm²	KFSN420	PTNY2-10	1.079	2.0	0.807	20.5	0.413 (10.5)	0.177 (4.5)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSN421	PTNY2-12	1.079	2.0	0.886	22.5						1000
	KFSN422	PTNY2-18	1.079	2.0	1.122	28.5						1000
A.W.G. 14-12 2.5~4mm²	KFSN430	PTNY3.5-10	0.118	3.0	0.925	23.5	0.531 (13.5)	0.236 (6.0)	0.039 (1.0)	black	IZUMI 5#	1000
	KFSN431	PTNY3.5-13	0.118	3.0	1.043	26.5						1000
A.W.G. 12-10 4~6mm²	KFSN440	PTNY5.5-13	1.118	3.0	1.043	26.5	0.531 (13.5)	0.276 (7.0)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSN441	PTNY5.5-18	1.118	3.0	1.24	31.5						1000