


Vinyl-Insulated Single Crimp (Easy Entry) Pin Terminals

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm ²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	75°C		

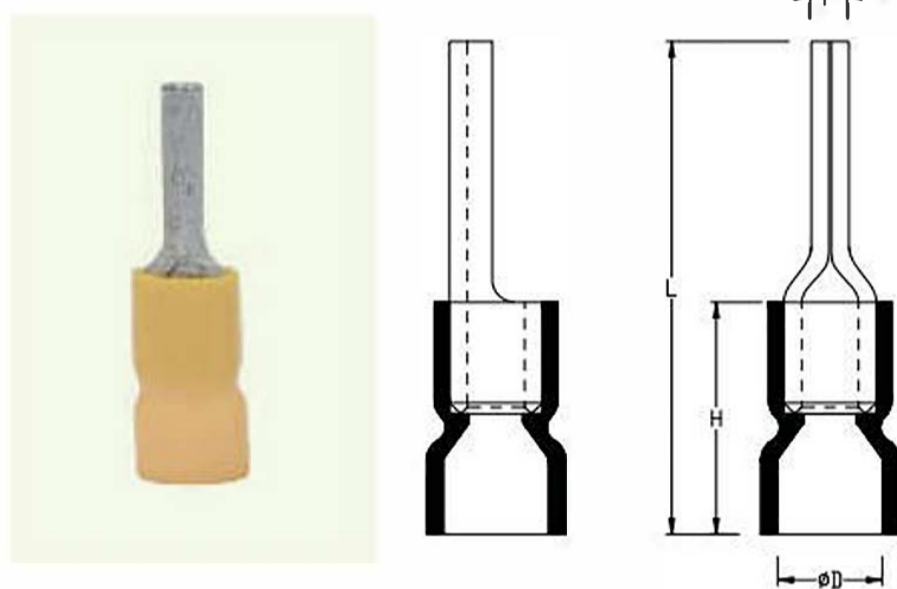

Wire Range	SKU#	MFG#	Dimension(mm)					Color	Tool	pcs/pack		
			F	L	H	D	T					
A.W.G. 22-16 0.5~1.5mm ²	KFSE410	PTVE1.25-10	0.079	2.0	0.827	21.0	0.433 (11.0)	0.157 (4.0)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSE411	PTVE1.25-12	0.079	2.0	0.906	23.0						1000
	KFSE412	PTVE1.25-18	0.079	2.0	1.142	29.0						1000
A.W.G. 16-14 1.5~2.5mm ²	KFSE420	PTVE2-10	0.079	2.0	0.846	21.5	0.453 (11.5)	0.177 (4.5)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSE421	PTVE2-12	0.079	2.0	0.925	23.5						1000
	KFSE422	PTVE2-18	0.079	2.0	1.161	29.5						1000
A.W.G. 12-10 4~6mm ²	KFSE430	PTVE5.5-13	0.118	3.0	1.063	27.0	0.511 (14.0)	0.256 (6.5)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSE431	PTNE5.5-18	0.118	3.0	1.26	32.0						1000