


Vinyl-Insulated Butt Splice Connectors (Parallel)

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	26-22	22-16	16-14	12-10	8	6	4	2
Spec (JIS AWG)	0.5	1.25	2	5.5	8	14	22	38
Spec (DIN AWG)	0.5	1	2.5	4.0-6.0	10	16	25	35
Spec (GB mm ²)	0.1-0.5	0.5-1.5	2.5	6	10	16	25	35
Max Current	9	19	27	48	62	88	115	160
Operating Voltage	600V							
Temperature Withstand	75°C							

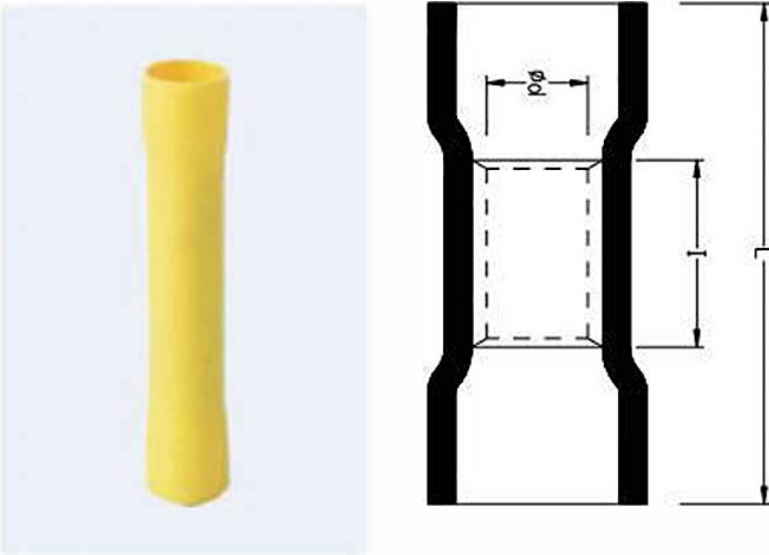

Wire Range	SKU#	MFG#	Dimension(mm)						Color	Tool	pcs/pack
			l		d		L				
A.W.G. 26–22 0.2~0.5mm ²	KFBVS10	PVT0.5	0.315	8.0	0.059	1.5	0.531	13.5	yellow	OPT SN–02C	1000
A.W.G. 22–16 0.5~1.5mm ²	KFBVS20	PVT1.25	0.315	8.0	0.067	1.7	0.65	16.5	red	IZUMI 3#	1000
A.W.G. 16–14 1.5~2.5mm ²	KFBVS30	PVT2	0.315	8.0	0.098	2.5	0.65	16.5	blue	IZUMI 4#	1000
A.W.G. 12–10 4~6mm ²	KFBVS40	PVT5.5	0.335	8.5	0.138	3.5	0.787	20.0	yellow	IZUMI 5#	1000
A.W.G. 8 8mm ²	KFBVS50	PVT8	0.374	9.5	0.177	4.5	0.945	24.0	red	OPT TP–80	500
A.W.G. 6 14mm ²	KFBVS60	PVT14	0.433	11.0	0.236	6.0	1.181	30.0	blue	OPT TP–80	500
A.W.G. 4 22mm ²	KFBVS70	PVT22	0.531	13.5	0.315	8.0	1.457	37.0	yellow	OPT TP–80	500
A.W.G. 2 38mm ²	KFBVS80	PVT38	0.65	16.5	0.374	9.5	1.555	39.5	red	OPT TP–80	500