


Heat Shrink-Insulated Single Crimp Ring Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PE
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Heat Shrinkable Temperature	150°C		
Working Temperature	-40~+105°C		

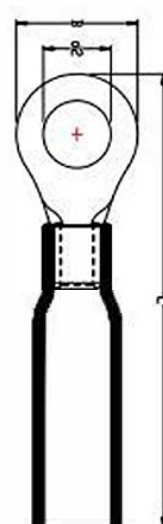

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)						Color	Tool	pcs/pack	
			USA	Meri	d2		W		L					T
A.W.G. 22~16 0.5~1.5mm ²	KFSH110	RHB1.25~3	#4	3.0	0.126	3.2	0.217	5.5	1.161	29.5	0.03 (0.75)	red	IZUMI 3#	1000
	KFSH111	RHBS1.25~3.5	#6	3.5	0.146	3.7	0.217	5.5	1.161	29.5				1000
	KFSH112	RHBM1.25~3.5	#6	3.5	0.146	3.7	0.256	6.5	1.24	31.5				1000
	KFSH113	RHBS1.25~4	#8	4.0	0.169	4.3	0.256	6.5	1.24	31.5				1000
	KFSH114	RHBL1.25~4	#8	4.0	0.169	4.3	0.315	8.0	1.299	33.0				1000
	KFSH115	RHB1.25~5	#10	5.0	0.209	5.3	0.315	8.0	1.299	33.0				1000
	KFSH116	RHBL1.25~5	#10	5.0	0.209	5.3	0.394	10.0	1.378	35.0				1000
	KFSH117	RHBS1.25~6	1/4"	6.0	0.256	6.5	0.394	10.0	1.378	35.0				1000
	KFSH118	RHB1.25~6	1/4"	6.0	0.256	6.5	0.453	11.5	1.535	39.0				1000
	KFSH119	RHB1.25~8	5/16"	8.0	0.335	8.5	0.453	11.5	1.535	39.0				1000
	KFSH11A	RHB1.25~10	3/8"	10.0	0.413	10.5	0.531	13.5	1.673	42.5				1000
	KFSH11B	RHB1.25~12	1/2"	12.0	0.512	13.0	0.748	19.0	1.87	47.5				500
A.W.G. 16~14 1.5~2.5mm ²	KFSH120	RHB2~3	#4	3.0	0.126	3.2	0.256	6.5	1.181	30.0	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSH121	RHBS2~3.5	#6	3.5	0.146	3.7	0.256	6.5	1.181	30.0				1000
	KFSH122	RHBM2~3.5	#6	3.5	0.146	3.7	0.256	6.5	1.24	31.5				1000
	KFSH123	RHBS2~4	#8	4.0	0.169	4.3	0.256	6.5	1.24	31.5				1000
	KFSH124	RHBL2~4	#8	4.0	0.169	4.3	0.335	8.5	1.339	34.0				1000
	KFSH125	RHBS2~5	#10	5.0	0.209	5.3	0.335	8.5	1.339	34.0				1000
	KFSH126	RHBL2~5	#10	5.0	0.209	5.3	0.374	9.5	1.339	34.0				1000
	KFSH127	RHB2~6	1/4"	6.0	0.256	6.5	0.472	12.0	1.535	39.0				1000
	KFSH128	RHB2~8	5/16"	8.0	0.335	8.5	0.472	12.0	1.535	39.0				1000
	KFSH129	RHB2~10	3/8"	10.0	0.413	10.5	0.531	13.5	1.673	42.5				1000
	KFSH12A	RHB2~12	1/2"	12.0	0.512	13.0	0.748	19.0	1.87	47.5				500
	A.W.G. 12~10 4~6mm ²	KFSH130	RHB5.5~3.5	#6	3.5	0.146	3.7	0.276	7.0	1.28				32.5
KFSH131		RHBS5.5~4	#8	4.0	0.169	4.3	0.276	7.0	1.28	32.5	1000			
KFSH132		RHBL5.5~4	#8	4.0	0.169	4.3	0.374	9.5	1.417	36.0	1000			
KFSH133		RHB5.5~5	#10	5.0	0.209	5.3	0.374	9.5	1.417	36.0	1000			
KFSH134		RHB5.5~6	1/4"	6.0	0.256	6.5	0.472	12.0	1.555	39.5	500			
KFSH135		RHB5.5~8	5/16"	8.0	0.335	8.5	0.591	15.0	1.724	43.8	500			
KFSH136		RHB5.5~10	3/8"	10.0	0.413	10.5	0.591	15.0	1.724	43.8	500			
KFSH137		RHB5.5~12	1/2"	12.0	0.512	13.0	0.748	19.0	1.909	48.5	500			