


Screw-On Cap Connectors (Without Spring)

Brand	KF [®]
Finish/Coating	Tinned
Base Materials	Flameproof modified engineering plastic, Galvanized steel
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)			
Spec (JIS AWG)			
Spec (DIN AWG)			
Spec (GB mm ²)			
Max Current			
Operating Voltage	SP1-SP2:300V SP3-SP6:600V		
Temperature Withstand	105°C		

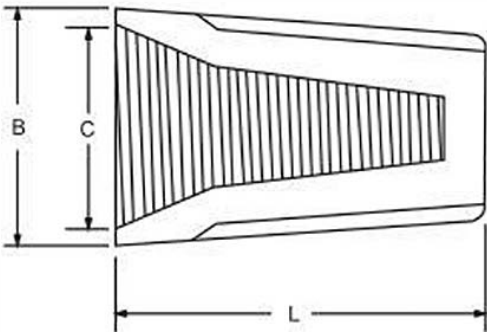

Wire Range	SKU#	MFG#	Dimensions Inch (mm)						Color	pcs/pack
			B		C		L			
最少0.75*1+0.5*1 最多1.5*2 min0.75*1+0.75*1 max1.5*2	KFRSO10	SP1	0.335	8.5	0.256	6.5	0.591	15.0	Gray	1000
最少0.75*3 最多1.5*3 min0.75*3 max1.5*3	KFRSO20	SP2	0.394	10.0	0.295	7.5	0.689	17.5	blue	1000
最少0.75*3 最多1.5*3+1*1 min0.75*3 max1.5*3+1*1	KFRSO30	SP3	0.492	12.5	0.374	9.5	0.866	22.0	Orange	500
最少0.25*1+0.75*1 最多2.5*4+0.75*1 min0.25*1+0.75*1 max2.5*4+0.75*1	KFRSO40	SP4	0.551	14.0	0.433	11.0	0.965	24.5	yellow	500
最少0.25*2 最多6*2+4*2 min0.25*2 max6*2+4*2	KFRSO50	SP6	0.63	16.0	0.512	13.0	1.043	26.5	red	200