


Vinyl-Insulated Single Crimp (Easy Entry) Spade Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	12-10
Spec (JIS AWG)	1.25	2	5.5
Spec (DIN AWG)	1	2.5	4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	6
Max Current	19	27	48
Operating Voltage	600V		
Temperature Withstand	75°C		

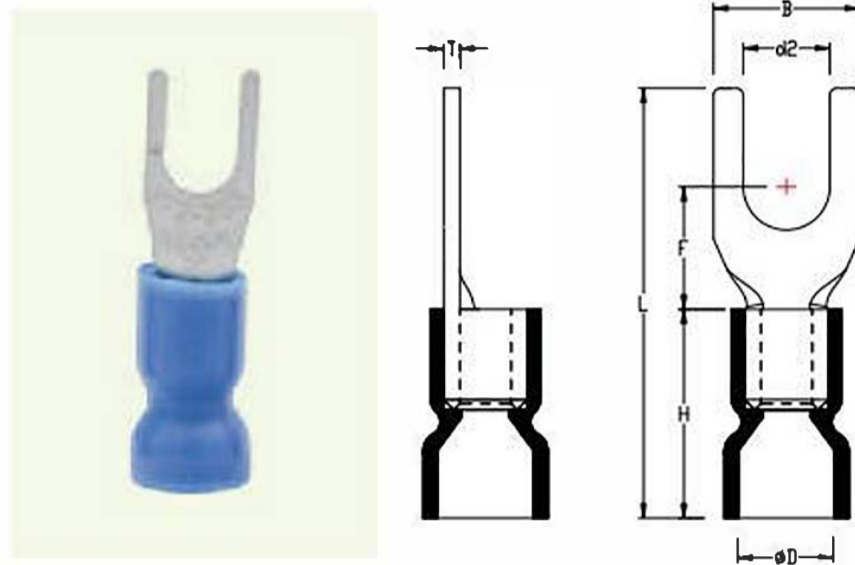

Insulated Single Crimp Terminals

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)								Color	Tool	pcs/pack			
			USA	Meri	d2	B	F	L	H	D	T							
A.W.G. 22-16 0.5~1.5mm²	KFSE110	SVE1.25-3	#4	3	0.126	3.2	0.217	5.5	0.256	6.5	0.866	22.0	0.433 (11.0)	0.157 (4.0)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSE111	SVES1.25-3.5	#6	3.5	0.146	3.7	0.217	5.5	0.256	6.5	0.866	22.0						1000
	KFSE112	SVEL1.25-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.256	6.5	0.866	22.0						1000
	KFSE113	SVES1.25-4	#8	4	0.169	4.3	0.256	6.5	0.256	6.5	0.866	22.0						1000
	KFSE114	SVEM1.25-4	#8	4	0.169	4.3	0.276	7.0	0.256	6.5	0.866	22.0						1000
	KFSE115	SVEL1.25-4	#8	4	0.169	4.3	0.315	8.0	0.256	6.5	0.866	22.0						1000
	KFSE116	SVES1.25-5	#10	5	0.209	5.3	0.315	8.0	0.256	6.5	0.866	22.0						1000
	KFSE117	SVEL1.25-5	#10	5	0.209	5.3	0.374	9.5	0.256	6.5	0.866	22.0						1000
	KFSE118	SVES1.25-6	1/4"	6	0.252	6.4	0.374	9.5	0.256	6.5	0.866	22.0						1000
	KFSE119	SVEL1.25-6	1/4"	6	0.252	6.4	0.472	12.0	0.433	11.0	1.102	28.0						1000
A.W.G. 16-14 1.5~2.5mm²	KFSE120	SVE2-3	#4	3	0.126	3.2	0.217	5.5	0.256	6.5	0.886	22.5	0.453 (11.5)	0.177 (4.5)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSE121	SVES2.-3.5	#6	3.5	0.146	3.7	0.217	5.5	0.256	6.5	0.886	22.5						1000
	KFSE122	SVEL2-3.5	#6	3.5	0.146	3.7	0.276	7.0	0.256	6.5	0.886	22.5						1000
	KFSE123	SVES2-4	#8	4	0.169	4.3	0.256	6.5	0.256	6.5	0.886	22.5						1000
	KFSE124	SVEM2-4	#8	4	0.169	4.3	0.276	7.0	0.256	6.5	0.886	22.5						1000
	KFSE125	SVEL2-4	#8	4	0.169	4.3	0.315	8.0	0.256	6.5	0.886	22.5						1000
	KFSE126	SVES2-5	#10	5	0.209	5.3	0.315	8.0	0.256	6.5	0.886	22.5						1000
	KFSE127	SVEL2-5	#10	5	0.209	5.3	0.374	9.5	0.256	6.5	0.886	22.5						1000
	KFSE128	SVES2-6	1/4"	6	0.252	6.4	0.374	9.5	0.256	6.5	0.886	22.5						1000
	KFSE129	SVEL2-6	1/4"	6	0.252	6.4	0.472	12.0	0.433	11.0	1.122	28.5						1000
A.W.G. 12-10 4~6mm²	KFSE130	SVE5.5-3.5	#6	3.5	0.146	3.7	0.335	8.5	0.295	7.5	1.043	26.5	0.551 (14.0)	0.256 (6.5)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSE131	SVES5.5-4	#8	4	0.169	4.3	0.335	8.5	0.295	7.5	1.043	26.5						1000
	KFSE132	SVEL5.5-4	#8	4	0.169	4.3	0.374	9.5	0.295	7.5	1.043	26.5						1000
	KFSE133	SVE5.5-5	#10	5	0.209	5.3	0.354	9.0	0.295	7.5	1.043	26.5						1000
	KFSE134	SVES5.5-6	1/4"	6	0.252	6.4	0.354	9.0	0.295	7.5	1.043	26.5						1000
	KFSE135	SVEL5.5-6	1/4"	6	0.252	6.4	0.472	12.0	0.472	12.0	1.28	32.5						1000
	KFSE136	SVE5.5-8	5/16"	8	0.331	8.4	0.551	14.0	0.453	11.5	1.24	31.5						1000