


Copper Tubular Lugs (Type T 90°)

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec(American AWG)	8	6	4	2	1/0	2/0	3/0	4/0
Spec(JIS AWG)	10	16	25	35	50	70	95	120
Spec(DIN AWG)								
Spec(GB mm²)								
Max Current	70	95					310	360
Spec(American AWG)	250/300MCM			300/350MCM			400MCM	
Spec(JIS AWG)	150			185			240	
Spec(DIN AWG)								
Spec(GB mm²)								
Max Current	445			505			545	

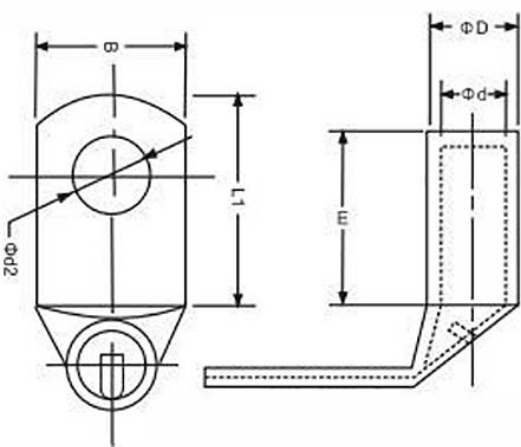

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)												Tool	pcs/pack
			USA	Meriç	d2		B		L1	L2	D		d		E			
A.W.G. 8 10mm ²	KFLT910	T90-10/6	1/4"	6	0.252	6.4	0.469	11.9	0.492	12.5	0.272	6.9	0.185	4.7	0.413	10.5	IZUMI 5N18	500
	KFLT911	T90-10/8	5/16"	8	0.327	8.3	0.531	13.5	0.61	15.5	0.272	6.9	0.185	4.7	0.413	10.5		500
A.W.G. 6 16mm ²	KFLT920	T90-16/6	1/4"	6	0.252	6.4	0.469	11.9	0.472	12.0	0.307	7.8	0.22	5.6	0.433	11.0	OPT TP-150D	500
	KFLT921	T90-16/8	5/16"	8	0.327	8.3	0.531	13.5	0.61	15.5	0.31	7.8	0.22	5.6	0.433	11.0		500
A.W.G. 4 25mm ²	KFLT930	T90-25/8	5/16"	8	0.327	8.3	0.551	14.0	0.63	16.0	0.374	9.5	0.28	7.1	0.512	13.0	OPT TP-150D	250
	KFLT931	T90-25/10	3/8"	10	0.413	10.5	0.63	16.0	0.748	19.0	0.374	9.5	0.28	7.1	0.512	13.0		250
A.W.G. 2 35mm ²	KFLT940	T90-35/8	5/16"	8	0.327	8.3	0.65	16.5	0.709	18.0	0.433	11.0	0.323	8.2	0.63	16.0	OPT TP-150D	200
	KFLT941	T90-35/10	3/8"	10	0.413	10.5	0.65	16.5	0.866	22.0	0.433	11.0	0.323	8.2	0.63	16.0		200
A.W.G. 1/0 50mm ²	KFLT950	T90-50/10	3/8"	10	0.413	10.5	0.705	17.9	0.866	22.0	0.492	12.5	0.374	9.5	0.748	19.0	OPT TP-150D	100
	KFLT951	T90-50/12	1/2"	12	0.512	13.0	0.705	17.9	0.866	22.0	0.492	12.5	0.374	9.5	0.748	19.0		100
A.W.G. 2/0 70mm ²	KFLT960	T90-70/10	3/8"	10	0.413	10.5	0.846	21.5	0.866	22.0	0.591	15.0	0.453	11.5	0.827	21.0	OPT TP-150D	100
	KFLT961	T90-70/12	1/2"	12	0.512	13.0	0.846	21.5	0.866	22.0	0.591	15.0	0.453	11.5	0.827	21.0		100
A.W.G. 3/0 95mm ²	KFLT970	T90-95/14	9/16"	14	0.571	14.5	0.972	24.7	1.299	33.0	0.669	17.0	0.531	13.5	0.945	24.0	OPT TP-150D	50
	KFLT971	T90-95/16	5/8"	16	0.65	16.5	0.972	24.7	1.299	33.0	0.669	17.0	0.531	13.5	0.945	24.0		50
A.W.G. 4/0 120mm ²	KFLT980	T90-120/14	9/16"	14	0.571	14.5	1.138	28.9	1.299	33.0	0.787	20.0	0.614	15.6	1.063	27.0	IZUMI EP-520C	30
	KFLT981	T90-120/16	5/8"	16	0.65	16.5	1.138	28.9	1.299	33.0	0.787	20.0	0.614	15.6	1.063	27.0		30
A.W.G.250/300MCM 150mm ²	KFLT990	T90-150/14	9/16"	14	0.571	14.5	1.197	30.4	1.299	33.0	0.827	21.0	0.65	16.5	1.26	32.0	IZUMI EP-520C	10
	KFLT991	T90-150/16	5/8"	16	0.65	16.5	1.197	30.4	1.299	33.0	0.827	21.0	0.65	16.5	1.26	32.0		10
A.W.G.300/350MCM 185mm ²	KFLT9A0	T90-185/16	5/8"	16	0.65	16.5	1.339	34.0	1.378	35.0	0.929	23.6	0.724	18.4	1.339	34.0	IZUMI EP-520C	10
A.W.G.400MCM 240mm ²	KFLT9B0	T90-240/16	5/8"	16	0.65	16.5	1.516	38.5	1.378	35.0	1.039	26.4	0.835	21.2	1.496	38.0	IZUMI EP-520C	10