


PP-Insulated Twin Cord End Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PP
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	5	7.5	10	15	25	40	60	10-	16-
Spec (JIS AWG)									
Spec (DIN AWG)									
Spec (GB mm ²)									
Max Current	9	12	17	18	30	35	50	70	95
Operating Voltage	600V								
Temperature Withstand	105°C								

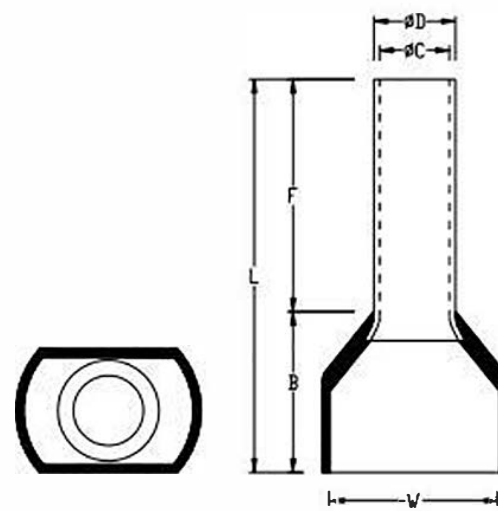

Cord End Terminals

Wire Range	SKU#	MFG#	Dimension(mm)								Color (1)German (2)Franch	Tool	pcs/pack
			F	L	W	B	D	C					
A.W.G. 22*2 0.5mm ² *2	KFC2V10	TE 0508	0.315	8.0	0.571	14.5	0.197 (5.0)	0.256 (6.5)	0.071 (1.8)	0.059 (1.5)	(1)White (2)White	OPT AN-10WF	2000
	KFC2V11	TE 0510	0.394	10.0	0.65	16.5							2000
	KFC2V12	TE 0512	0.472	12.0	0.728	18.5							2000
A.W.G. 20*2 0.75mm ² *2	KFC2V20	TE 7508	0.315	8.0	0.591	15.0	0.217 (5.5)	0.276 (7.0)	0.081 (2.1)	0.067 (1.7)	(1)Blue (2)Gray	OPT AN-10WF	2000
	KFC2V21	TE 7510	0.394	10.0	0.669	17.0							2000
	KFC2V22	TE 7512	0.472	12.0	0.748	19.0							2000
A.W.G. 18*2 1mm ² *2	KFC2V30	TE 1008	0.315	8.0	0.591	15.0	0.217 (5.5)	0.276 (7.0)	0.091 (2.3)	0.079 (2.0)	(1)Red (2)Red	OPT AN-10WF	2000
	KFC2V31	TE 1010	0.394	10.0	0.669	17.0							2000
	KFC2V32	TE 1012	0.472	12.0	0.748	19.0							2000
A.W.G. 16*2 1.5mm ² *2	KFC2V40	TE 1508	0.315	8.0	0.61	15.5	0.256 (6.5)	0.295 (7.5)	0.102 (2.6)	0.091 (2.3)	(1)Black (2)Yellow	OPT AN-10WF	1000
	KFC2V41	TE 1510	0.394	10.0	0.689	17.5							1000
	KFC2V42	TE 1512	0.472	12.0	0.768	19.5							1000
	KFC2V43	TE 1515	0.591	15.0	0.886	22.5							1000
	KFC2V44	TE 1518	0.709	18.0	1.004	25.5							1000
A.W.G. 14*2 2.5mm ² *2	KFC2V50	TE 2508	0.315	8.0	0.65	16.5	0.315 (8.0)	0.335 (8.5)	0.13 (3.3)	0.116 (2.95)	(1)Gray (2)Blue	OPT AN-10WF	1000
	KFC2V51	TE 2510	0.394	10.0	0.728	18.5							1000
	KFC2V52	TE 2513	0.512	13.0	0.846	21.5							1000
	KFC2V53	TE 2518	0.709	18.0	1.043	26.5							1000
A.W.G. 12*2 4mm ² *2	KFC2V60	TE 4009	0.354	9.0	0.689	17.5	0.354 (9.0)	0.335 (8.5)	0.165 (4.2)	0.152 (3.85)	(1)Orange (2)Blue	OPT AN-10WF	1000
	KFC2V61	TE 4012	0.472	12.0	0.807	20.5							1000
A.W.G. 10*2 6mm ² *2	KFC2V70	TE 6012	0.472	12.0	0.866	22.0	0.374 (9.5)	0.394 (10.0)	0.205 (5.2)	0.191 (4.85)	(1)Green (2)Yellow	OPT AN-25WF	500
	KFC2V71	TE 6014	0.551	14.0	0.945	24.0							500
A.W.G. 8*2 10mm ² *2	KFC2V80	TE 10-14	0.551	14.0	1.043	26.5	0.512 (13.0)	0.492 (12.5)	0.272 (6.9)	0.258 (6.55)	(1)Brown (2)Red	OPT AN-25WF	250
A.W.G. 6*2 16mm ² *2	KFC2V90	TE 16-14	0.551	14.0	1.24	31.5	0.728 (18.5)	0.689 (17.5)	0.346 (8.8)	0.333 (8.45)	(1)Milk (2)Blue	OPT AN-25WF	250