


Copper Tubular Lugs (Type WB 90°)

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP




Spec(American AWG)	10	8	6	4	2	1/0
Spec(JIS AWG)	6	10	16	25	35	50
Spec(DIN AWG)						
Spec(GB mm²)						
Max Current	50	70	95	125	170	230

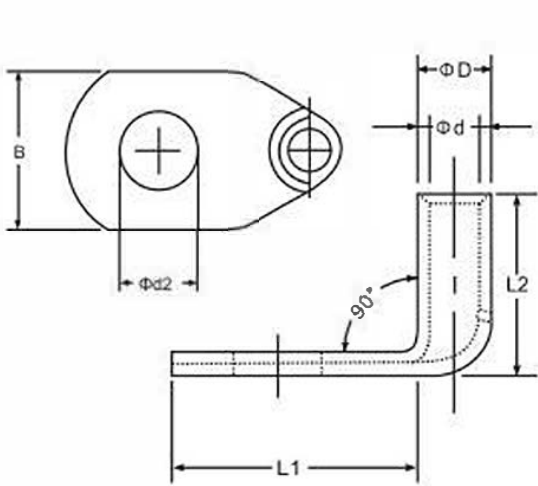

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)												Tool	pcs/pack
			USA	Meric	d2		L1		L2		D		d		B			
A.W.G. 10 6mm ²	KFLW901	WB90-5	#10	5	0.209	5.3	0.886	22.5	0.551	14.0	0.256	6.5	0.138	3.5	0.394	10.0	IZUMI 5N18	500
	KFLW902	WB90-6	1/4"	6	0.252	6.4	0.945	24.0	0.551	14.0	0.256	6.5	0.138	3.5	0.472	12.0		500
	KFLW903	WB90-8	5/16"	8	0.335	8.5	1.083	27.5	0.551	14.0	0.256	6.5	0.138	3.5	0.591	15.0		500
	KFLW904	WB90-10	3/8"	10	0.413	10.5	1.161	29.5	0.551	14.0	0.256	6.5	0.138	3.5	0.63	16.0		500
A.W.G. 8 10mm ²	KFLW911	WB90-10-5	#10	5	0.209	5.3	0.906	23.0	0.63	16.0	0.276	7.0	0.177	4.5	0.472	12.0	IZUMI 5N18	500
	KFLW912	WB90-10-6	1/4"	6	0.252	6.4	0.945	24.0	0.63	16.0	0.276	7.0	0.177	4.5	0.472	12.0		500
	KFLW913	WB90-10-8	5/16"	8	0.335	8.5	1.102	28.0	0.63	16.0	0.276	7.0	0.177	4.5	0.591	15.0		500
	KFLW914	WB90-10-10	3/8"	10	0.413	10.5	1.161	29.5	0.63	16.0	0.276	7.0	0.177	4.5	0.709	18.0		500
A.W.G. 6 16mm ²	KFLW921	WB90-16-6	#10	6	0.209	5.3	0.886	22.5	0.787	20.0	0.335	8.5	0.217	5.5	0.472	12.0	OPT TP-150D	500
	KFLW922	WB90-16-8	1/4"	8	0.252	6.4	0.945	24.0	0.787	20.0	0.335	8.5	0.217	5.5	0.551	14.0		500
	KFLW923	WB90-16-10	5/16"	10	0.335	8.5	1.102	28.0	0.787	20.0	0.335	8.5	0.217	5.5	0.591	15.0		500
	KFLW924	WB90-16-8	3/8"	8	0.413	10.5	1.22	31.0	0.787	20.0	0.335	8.5	0.217	5.5	0.709	18.0		500
	KFLW925	WB90-16-10	1/2"	10	0.512	13.0	1.26	32.0	0.787	20.0	0.335	8.5	0.217	5.5	0.748	19.0		500
A.W.G. 4 25mm ²	KFLW931	WB90-25/6	1/4"	6	0.252	6.4	1.083	27.5	0.827	21.0	0.394	10.0	0.272	6.9	0.591	15.0	OPT TP-150D	250
	KFLW932	WB90-25/8	5/16"	8	0.331	8.4	1.28	32.5	0.827	21.0	0.394	10.0	0.272	6.9	0.63	16.0		250
	KFLW933	WB90-25/10	3/8"	10	0.413	10.5	1.28	32.5	0.827	21.0	0.394	10.0	0.272	6.9	0.709	18.0		250
	KFLW934	WB90-25/12	1/2"	12	0.512	13.0	1.339	34.0	0.827	21.0	0.394	10.0	0.272	6.9	0.748	19.0		250
A.W.G. 2 35mm ²	KFLW941	WB90-35/6	1/4"	6	0.252	6.4	1.122	28.5	0.945	24.0	0.472	12.0	0.335	8.5	0.669	17.0	OPT TP-150D	200
	KFLW942	WB90-35/8	5/16"	8	0.335	8.5	1.339	34.0	0.945	24.0	0.472	12.0	0.335	8.5	0.669	17.0		200
	KFLW943	WB90-35/10	3/8"	10	0.413	10.5	1.339	34.0	0.945	24.0	0.472	12.0	0.335	8.5	0.787	20.0		200
	KFLW944	WB90-35/12	1/2"	12	0.512	13.0	1.594	40.5	0.945	24.0	0.472	12.0	0.335	8.5	0.866	22.0		200
A.W.G. 1/0 50mm ²	KFLW951	WB90-50/6	1/4"	6	0.252	6.4	1.457	37.0	1.122	28.5	0.551	14.0	0.394	10.0	0.787	20.0	OPT TP-150D	100
	KFLW952	WB90-50/8	5/16"	8	0.331	8.4	1.594	40.5	1.122	28.5	0.551	14.0	0.394	10.0	0.787	20.0		100
	KFLW953	WB90-50/10	3/8"	10	0.413	10.5	1.594	40.5	1.122	28.5	0.551	14.0	0.394	10.0	0.787	20.0		100
	KFLW954	WB90-50/12	1/2"	12	0.512	13.0	1.673	42.5	1.122	28.5	0.551	14.0	0.394	10.0	0.906	23.0		100
	KFLW955	WB90-50/16	5/8"	16	0.669	17.0	1.988	50.5	1.122	28.5	0.551	14.0	0.394	10.0	1.102	28.0		100

Copper Tubular Lugs (Type WB 90°)

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP

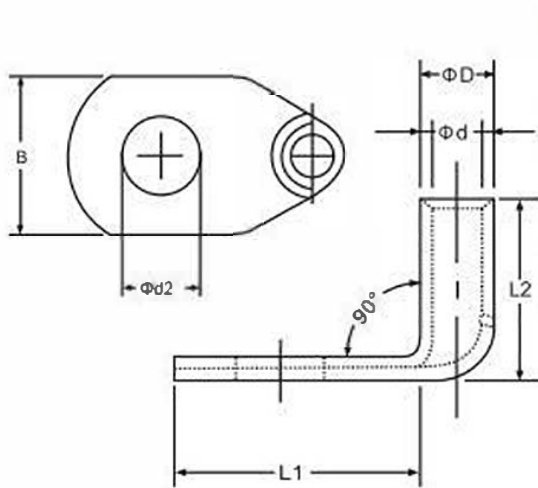

Spec(American AWG)	2/0	3/0	4/0	250/300MCM
Spec(JIS AWG)	70	95	120	150
Spec(DIN AWG)				
Spec(GB mm²)				
Max Current	265	310	360	445
Spec(American AWG)	300/350MCM	400MCM	500MCM	600/750MCM
Spec(JIS AWG)	185	240	300	400
Spec(DIN AWG)				
Spec(GB mm²)				
Max Current	505	545	620	785



Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)												Tool	pcs/pack
			USA	Meric	d2		L1		L2		D		d		B			
A.W.G. 2/0 70mm ²	KFLW970	WB90-70/8	5/16"	8	0.335	8.5	1.693	43.0	1.22	31.0	0.65	16.5	0.472	12.0	0.945	24.0	OPT TP-150D	100
	KFLW971	WB90-70/10	3/8"	10	0.413	10.5	1.693	43.0	1.22	31.0	0.65	16.5	0.472	12.0	0.945	24.0		100
	KFLW972	WB90-70/12	1/2"	12	0.512	13.0	1.752	44.5	1.22	31.0	0.65	16.5	0.472	12.0	0.945	24.0		100
	KFLW973	WB90-70/16	5/8"	16	0.669	17.0	2.087	53.0	1.22	31.0	0.65	16.5	0.472	12.0	1.102	28.0		100
	KFLW974	WB90-70/20	3/4"	20	0.827	21.0	2.323	59.0	1.22	31.0	0.65	16.5	0.472	12.0	1.181	30.0		100
A.W.G. 3/0 95mm ²	KFLW980	WB90-95/8	5/16"	8	0.335	8.5	1.752	44.5	1.378	35.0	0.709	18.0	0.531	13.5	1.024	26.0	OPT TP-150D	50
	KFLW981	WB90-95/10	3/8"	10	0.413	10.5	1.752	44.5	1.378	35.0	0.709	18.0	0.531	13.5	1.024	26.0		50
	KFLW982	WB90-95/12	1/2"	12	0.512	13.0	1.831	46.5	1.378	35.0	0.709	18.0	0.531	13.5	1.024	26.0		50
	KFLW983	WB90-95/16	5/8"	16	0.669	17.0	2.047	52.0	1.378	35.0	0.709	18.0	0.531	13.5	1.102	28.0		50
	KFLW984	WB90-95/20	3/4"	20	0.827	21.0	2.323	59.0	1.378	35.0	0.709	18.0	0.531	13.5	1.201	30.5		50
A.W.G. 4/0 120mm ²	KFLW990	WB90-120/10	3/8"	10	0.413	10.5	1.929	49.0	1.398	35.5	0.768	19.5	0.591	15.0	1.142	29.0	IZUMI EP-520C	30
	KFLW991	WB90-120/12	1/2"	12	0.512	13.0	1.929	49.0	1.398	35.5	0.768	19.5	0.591	15.0	1.142	29.0		30
	KFLW992	WB90-120/16	5/8"	16	0.669	17.0	2.165	55.0	1.398	35.5	0.768	19.5	0.591	15.0	1.142	29.0		30
	KFLW993	WB90-120/20	3/4"	20	0.827	21.0	2.402	61.0	1.398	35.5	0.768	19.5	0.591	15.0	1.201	30.5		30
A.W.G.250/300MCM 150mm ²	KFLW9A0	WB90-150/10	3/8"	10	0.413	10.5	1.89	48.0	1.575	40.0	0.827	21.0	0.65	16.5	1.22	31.0	IZUMI EP-520C	10
	KFLW9A1	WB90-150/12	1/2"	12	0.512	13.0	2.008	51.0	1.575	40.0	0.827	21.0	0.65	16.5	1.22	31.0		10
	KFLW9A2	WB90-150/16	5/8"	16	0.669	17.0	2.205	56.0	1.575	40.0	0.827	21.0	0.65	16.5	1.22	31.0		10
	KFLW9A3	WB90-150/20	3/4"	20	0.827	21.0	2.421	61.5	1.575	40.0	0.827	21.0	0.65	16.5	1.339	34.0		10
A.W.G.300/350MCM 185mm ²	KFLW9B0	WB90-185/12	1/2"	12	0.512	13.0	2.303	58.5	1.811	46.0	0.945	24.0	0.748	19.0	1.378	35.0	IZUMI EP-520C	10
	KFLW9B1	WB90-185/16	5/8"	16	0.669	17.0	2.303	58.5	1.811	46.0	0.945	24.0	0.748	19.0	1.378	35.0		10
	KFLW9B2	WB90-185/20	3/4"	20	0.827	21.0	2.559	65.0	1.811	46.0	0.945	24.0	0.748	19.0	1.378	35.0		10
A.W.G.400MCM 240mm ²	KFLW9C0	WB90-240/12	1/2"	12	0.512	13.0	2.126	54.0	1.969	50.0	1.024	26.0	0.827	21.0	1.575	40.0	IZUMI EP-520C	10
	KFLW9C1	WB90-240/16	5/8"	16	0.669	17.0	2.362	60.0	1.969	50.0	1.024	26.0	0.827	21.0	1.575	40.0		10
	KFLW9C2	WB90-240/20	3/4"	20	0.827	21.0	2.669	67.8	1.969	50.0	1.024	26.0	0.827	21.0	1.575	40.0		10
A.W.G.500MCM 300mm ²	KFLW9D0	WB90-300/12	1/2"	12	0.512	13.0	2.933	74.5	2.323	59.0	1.161	29.5	0.925	23.5	1.693	43.0	IZUMI EP-1000A	5
	KFLW9D1	WB90-300/16	5/8"	16	0.669	17.0	2.52	64.0	2.323	59.0	1.161	29.5	0.925	23.5	1.693	43.0		5
	KFLW9D2	WB90-300/20	3/4"	20	0.827	21.0	2.776	70.5	2.323	59.0	1.161	29.5	0.925	23.5	1.693	43.0		5
A.W.G.600/750MCM 400mm ²	KFLW9E0	WB90-400/12	1/2"	12	0.512	13.0	3.11	79.0	2.441	62.0	1.339	34.0	1.063	27.0	1.929	49.0	IZUMI EP-1000A	5
	KFLW9E1	WB90-400/16	5/8"	16	0.669	17.0	2.697	68.5	2.441	62.0	1.339	34.0	1.063	27.0	1.929	49.0		5
	KFLW9E2	WB90-400/20	3/4"	20	0.827	21.0	2.953	75.0	2.441	62.0	1.339	34.0	1.063	27.0	1.929	49.0		5