


Non-Insulated Ring Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP




Spec(American AWG)	26-22	22-16	16-14	14-12	12-10
Spec(JIS AWG)	0.5	1.25	2	3.5	5.5
Spec(DIN AWG)	0.5	1	2.5		4.0-6.0
Spec(GB mm²)	0.1-0.5	0.5-1.5	2.5	4	6.0
Max Current		19.0	27.0	37.0	48.0

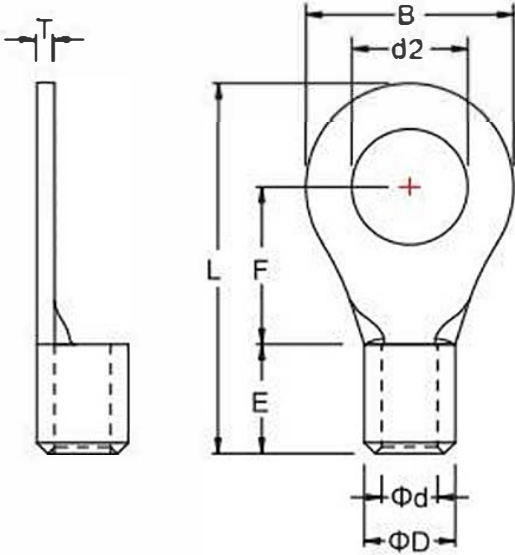

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)								Tool	pcs/pack				
			USA	Meri	d2		B		F		L				E	D	d	T
A.W.G. 22-16 0.5~1.5mm ²	KFO0110	RNB1.25-3	#4	3	0.126	3.2	0.217	5.5	0.197	5.0	0.492	12.5	0.197 (5.0)	0.138 (3.5)	0.079 (2.0)	0.03 (0.8)	IZUMI 5N18	1000
	KFO0111	RNBS1.25-3.5	#6	3.5	0.146	3.7	0.217	5.5	0.197	5.0	0.492	12.5						1000
	KFO0112	RNBM1.25-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.236	6.0	0.571	14.5						1000
	KFO0113	RNBS1.25-4	#8	4	0.169	4.3	0.256	6.5	0.236	6.0	0.571	14.5						1000
	KFO0114	RNBL1.25-4	#8	4	0.169	4.3	0.315	8.0	0.276	7.0	0.63	16.0						1000
	KFO0115	RNB1.25-5	#10	5	0.209	5.3	0.315	8.0	0.276	7.0	0.63	16.0						1000
	KFO0116	RNBL1.25-5	#10	5	0.209	5.3	0.394	10.0	0.315	8.0	0.709	18.0						1000
	KFO0117	RNBS1.25-6	1/4"	6	0.252	6.4	0.394	10.0	0.315	8.0	0.709	18.0						1000
	KFO0118	RNB1.25-6	1/4"	6	0.252	6.4	0.453	11.5	0.433	11.0	0.866	22.0						1000
	KFO0119	RNB1.25-8	5/16"	8	0.331	8.4	0.453	11.5	0.433	11.0	0.866	22.0						1000
	KFO011A	RNB1.25-10	3/8"	10	0.413	10.5	0.531	13.5	0.551	14.0	1.004	25.5						1000
	KFO011B	RNB1.25-12	1/2"	12	0.512	13.0	0.748	19.0	0.551	14.0	1.201	30.5						1000
A.W.G. 16-14 1.5~2.5mm ²	KFO0120	RNB2-3	#4	3	0.126	3.2	0.256	6.5	0.177	4.5	0.512	13.0	0.197 (5.0)	0.157 (4.0)	0.098 (2.5)	0.031 (0.8)	IZUMI 5N18	1000
	KFO0121	RNBS2-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.177	4.5	0.512	13.0						1000
	KFO0122	RNBM2-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.236	6.0	0.571	14.5						1000
	KFO0123	RNBS2-4	#8	4	0.169	4.3	0.256	6.5	0.236	6.0	0.571	14.5						1000
	KFO0124	RNBL2-4	#8	4	0.169	4.3	0.335	8.5	0.315	8.0	0.669	17.0						1000
	KFO0125	RNBS2-5	#10	5	0.209	5.3	0.335	8.5	0.315	8.0	0.669	17.0						1000
	KFO0126	RNBL2-5	#10	5	0.209	5.3	0.374	9.5	0.295	7.5	0.669	17.0						1000
	KFO0127	RNB2-6	1/4"	6	0.252	6.4	0.472	12.0	0.433	11.0	0.866	22.0						1000
	KFO0128	RNB2-8	5/16"	8	0.331	8.4	0.472	12.0	0.433	11.0	0.866	22.0						1000
	KFO0129	RNB2-10	3/8"	10	0.413	10.5	0.531	13.5	0.551	14.0	1.004	25.5						1000
	KFO012A	RNB2-12	1/2"	12	0.512	13.0	0.748	19.0	0.63	16.0	1.201	30.5						1000
	A.W.G. 14-12 2.5~4mm ²	KFO0130	RNB3.5-4	#8	4	0.169	4.3	0.315	8.0	0.315	8.0	0.709						18.0
KFO0131		RNBS3.5-5	#10	5	0.209	5.3	0.315	8.0	0.315	8.0	0.709	18.0	1000					
KFO0132		RNBL3.5-5	#10	5	0.209	5.3	0.472	12.0	0.374	9.5	0.846	21.5	1000					
KFO0133		RNB3.5-6	1/4"	6	0.252	6.4	0.472	12.0	0.374	9.5	0.846	21.5	1000					
KFO0134		RNB3.5-8	5/16"	8	0.331	8.4	0.591	15.0	0.531	13.5	1.063	27.0	1000					
KFO0135		RNB3.5-10	3/8"	10	0.413	10.5	0.591	15.0	0.531	13.5	1.063	27.0	1000					
KFO0136		RNB3.5-12	1/2"	12	0.512	13.0	0.787	20.0	0.61	15.5	1.24	31.5	1000					
A.W.G. 12-10 4~6mm ²	KFO0140	RNB5.5-3.5	#6	3.5	0.146	3.7	0.276	7.0	0.236	6.0	0.65	16.5	0.276 (7.0)	0.217 (5.5)	0.138 (3.5)	0.039 (1.0)	IZUMI 5N18	1000
	KFO0141	RNBS5.5-4	#8	4	0.169	4.3	0.276	7.0	0.236	6.0	0.65	16.5						1000
	KFO0142	RNBL5.5-4	#8	4	0.169	4.3	0.374	9.5	0.315	8.0	0.787	20.0						1000
	KFO0143	RNB5.5-5	#10	5	0.209	5.3	0.374	9.5	0.315	8.0	0.787	20.0						1000
	KFO0144	RNB5.5-6	1/4"	6	0.252	6.4	0.472	12.0	0.413	10.5	0.925	23.5						1000
	KFO0145	RNB5.5-8	5/16"	8	0.331	8.4	0.591	15.0	0.531	13.5	1.094	27.8						1000
	KFO0146	RNB5.5-10	3/8"	10	0.413	10.5	0.591	15.0	0.531	13.5	1.094	27.8						1000
	KFO0147	RNB5.5-12	1/2"	12	0.512	13.0	0.748	19.0	0.63	16.0	1.28	32.5						500

Non-Insulated Ring Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP

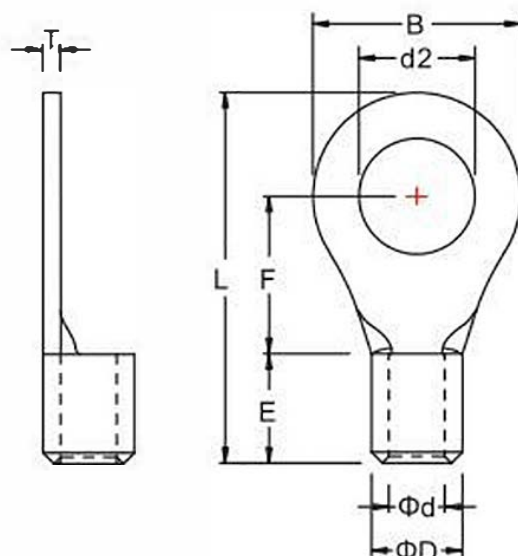


Spec(American AWG)	8	6	4	2	1	1/0
Spec(JIS AWG)	8	14	22	38		60
Spec(DIN AWG)	10	16	25	35	50	
Spec(GB mm²)	10	16	25	35	50	60
Max Current	62.0	88.0	115.0	160.0		215.0



Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)										Tool	pcs/pack		
			USA	Meric	d2		B		F		L		E	D			d	T
A.W.G. 8 8mm ²	KFO0150	RNB8-4	#8	4	0.169	4.3	0.346	8.8	0.413	10.5	0.925	23.5	0.335 (8.5)	0.276 (7.0)	0.197 (5.0)	0.047 (1.2)	IZUMI 5N18	500
	KFO0151	RNBS8-5	#10	5	0.209	5.3	0.346	8.8	0.413	10.5	0.925	23.5						500
	KFO0152	RNBM8-5	#10	5	0.209	5.3	0.472	12.0	0.354	9.0	0.925	23.5						500
	KFO0153	RNBL8-5	#10	5	0.209	5.3	0.591	15.0	0.551	14.0	1.181	30.0						500
	KFO0154	RNBS8-6	1/4"	6	0.252	6.4	0.472	12.0	0.354	9.0	0.925	23.5						500
	KFO0155	RNBL8-6	1/4"	6	0.252	6.4	0.591	15.0	0.551	14.0	1.181	30.0						500
	KFO0156	RNB8-8	5/16"	8	0.331	8.4	0.591	15.0	0.551	14.0	1.181	30.0						500
	KFO0157	RNB8-10	3/8"	10	0.413	10.5	0.591	15.0	0.551	14.0	1.181	30.0						500
	KFO0158	RNB8-12	1/2"	12	0.512	13.0	0.866	22.0	0.591	15.0	1.358	34.5						500
A.W.G. 6 14mm ²	KFO0160	RNB14-4	#8	4	0.169	4.3	0.472	12.0	0.531	13.5	1.161	29.5	0.413 (10.5)	0.354 (9.0)	0.236 (6.0)	0.055 (1.4)	OPT TP- 150D	500
	KFO0161	RNB14-5	#10	5	0.209	5.3	0.472	12.0	0.531	13.5	1.161	29.5						500
	KFO0162	RNBS14-6	1/4"	6	0.252	6.4	0.472	12.0	0.531	13.5	1.161	29.5						500
	KFO0163	RNBL14-6	1/4"	6	0.252	6.4	0.63	16.0	0.551	14.0	1.28	32.5						500
	KFO0164	RNB14-8	5/16"	8	0.331	8.4	0.63	16.0	0.551	14.0	1.28	32.5						500
	KFO0165	RNB14-10	3/8"	10	0.413	10.5	0.63	16.0	0.551	14.0	1.28	32.5						500
	KFO0166	RNB14-12	1/2"	12	0.512	13.0	0.866	22.0	0.768	19.5	1.614	41.0						250
	KFO0167	RNB14-16	5/8"	16	0.669	17.0	1.181	30.0	1.004	25.5	2.008	51.0						250
A.W.G. 4 22mm ²	KFO0170	RNBS22-5	#10	5	0.209	5.3	0.472	12.0	0.571	14.5	1.28	32.5	0.472 (12.0)	0.453 (11.5)	0.315 (8.0)	0.067 (1.7)	OPT TP- 150D	250
	KFO0171	RNBL22-5	#10	5	0.209	5.3	0.65	16.5	0.531	13.5	1.319	33.5						250
	KFO0172	RNBS22-6	1/4"	6	0.252	6.4	0.472	12.0	0.571	14.5	1.28	32.5						250
	KFO0173	RNBL22-6	1/4"	6	0.252	6.4	0.65	16.5	0.531	13.5	1.319	33.5						250
	KFO0174	RNB22-8	5/16"	8	0.331	8.4	0.65	16.5	0.531	13.5	1.319	33.5						250
	KFO0175	RNB22-10	3/8"	10	0.413	10.5	0.65	16.5	0.531	13.5	1.319	33.5						250
	KFO0176	RNB22-12	1/2"	12	0.512	13.0	0.866	22.0	0.768	19.5	1.673	42.5						250
	KFO0177	RNB22-14	9/16"	14	0.591	15.0	1.181	30.0	0.984	25.0	2.047	52.0						100
	KFO0178	RNB22-16	5/8"	16	0.669	17.0	1.181	30.0	0.984	25.0	2.047	52.0						100
A.W.G. 2 38mm ²	KFO0180	RNB38-5	#10	5	0.209	5.3	0.61	15.5	0.728	18.5	1.575	40.0	0.551 (14.0)	0.531 (13.5)	0.374 (9.5)	0.071 (1.8)	OPT TP- 150D	200
	KFO0181	RNB38-6	1/4"	6	0.252	6.4	0.61	15.5	0.728	18.5	1.575	40.0						200
	KFO0182	RNBS38-8	5/16"	8	0.331	8.4	0.61	15.5	0.728	18.5	1.575	40.0						200
	KFO0183	RNBL38-8	5/16"	8	0.331	8.4	0.866	22.0	0.689	17.5	1.673	42.5						200
	KFO0184	RNBS38-10	3/8"	10	0.413	10.5	0.61	15.5	0.728	18.5	1.575	40.0						200
	KFO0185	RNBL38-10	3/8"	10	0.413	10.5	0.866	22.0	0.689	17.5	1.673	42.5						200
	KFO0186	RNB38-12	1/2"	12	0.512	13.0	0.866	22.0	0.689	17.5	1.673	42.5						200
	KFO0187	RNB38-14	9/16"	14	0.591	15.0	1.181	30.0	0.945	24.0	2.067	52.5						100
	KFO0188	RNB38-16	5/8"	16	0.669	17.0	1.181	30.0	0.945	24.0	2.067	52.5						100
	A.W.G. 1/0 60mm ²	KFO0190	RNB60-6	1/4"	6	0.252	6.4	0.866	22.0	0.807	20.5	1.949						49.5
KFO0191		RNB60-8	5/16"	8	0.331	8.4	0.866	22.0	0.807	20.5	1.949	49.5	100					
KFO0192		RNB60-10	3/8"	10	0.413	10.5	0.866	22.0	0.807	20.5	1.949	49.5	100					
KFO0193		RNB60-11	7/16"	11	0.453	11.5	0.866	22.0	0.807	20.5	1.949	49.5	100					
KFO0194		RNB60-12	1/2"	12	0.512	13.0	0.866	22.0	0.807	20.5	1.949	49.5	100					
KFO0195		RNB60-14	9/16"	14	0.591	15.0	1.26	32.0	0.925	23.5	2.264	57.5	100					
KFO0196		RNB60-16	5/8"	16	0.669	17.0	1.26	32.0	0.925	23.5	2.264	57.5	100					
KFO0197		RNB60-18	11/16"	18	0.748	19.0	1.26	32.0	0.925	23.5	2.264	57.5	100					
KFO0198		RNB60-20	3/4"	20	0.827	21.0	1.26	32.0	0.925	23.5	2.264	57.5	100					
KFO0199		RNB60-22	7/8"	22	0.906	23.0	1.26	32.0	0.925	23.5	2.264	57.5	100					

Non-Insulated Ring Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP

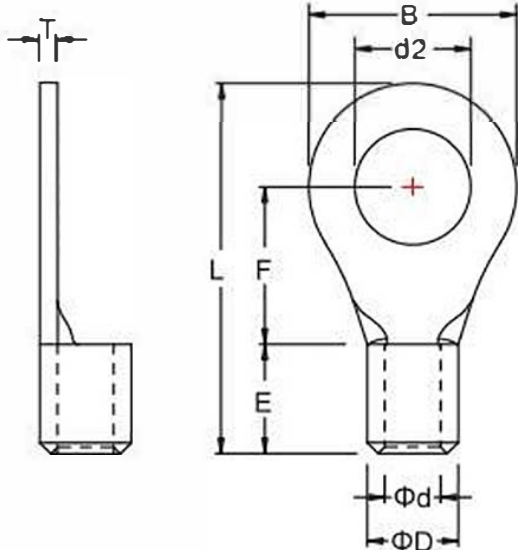

Spec(American AWG)	2/0	3/0	4/0	250-300MCM
Spec(JIS AWG)	70	80	100	150
Spec(DIN AWG)	70	95	120	150
Spec(GB mm²)	70	95	120	150
Max Current	235.0	255.0	300.0	395.0



Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)								Tool	pcs/pack				
			USA	Meric	d2		B		F		L				E	D	d	T
A.W.G. 2/0 70mm ²	KFO01A0	RNB70-6	1/4"	6	0.252	6.4	0.945	24.0	0.787	20.0	2.008	51.0	0.748 (19.0)	0.689 (17.5)	0.531 (13.5)	0.075 (1.9)	OPT TP-150D	100
	KFO01A1	RNB70-8	5/16"	8	0.331	8.4	0.945	24.0	0.787	20.0	2.008	51.0						100
	KFO01A2	RNB70-10	3/8"	10	0.413	10.5	0.945	24.0	0.787	20.0	2.008	51.0						100
	KFO01A3	RNB70-11	7/16"	11	0.453	11.5	0.945	24.0	0.787	20.0	2.008	51.0						100
	KFO01A4	RNB70-12	1/2"	12	0.512	13.0	0.945	24.0	0.787	20.0	2.008	51.0						100
	KFO01A5	RNB70-14	9/16"	14	0.591	15.0	1.26	32.0	1.024	26.0	2.402	61.0						50
	KFO01A6	RNB70-16	5/8"	16	0.669	17.0	1.26	32.0	1.024	26.0	2.402	61.0						50
	KFO01A7	RNB70-18	11/16"	18	0.748	19.0	1.26	32.0	1.024	26.0	2.402	61.0						50
	KFO01A8	RNB70-20	3/4"	20	0.827	21.0	1.26	32.0	1.024	26.0	2.402	61.0						50
	KFO01A9	RNB70-22	7/8"	22	0.906	23.0	1.26	32.0	1.024	26.0	2.402	61.0						50
A.W.G. 3/0 80mm ²	KFO01B0	RNB80-6	1/4"	6	0.252	6.4	1.063	27.0	0.787	20.0	2.126	54.0	0.787 (20.0)	0.768 (19.5)	0.591 (15.0)	0.087 (2.2)	IZUMI EP-150A	50
	KFO01B1	RNB80-8	5/16"	8	0.331	8.4	1.063	27.0	0.787	20.0	2.126	54.0						50
	KFO01B2	RNB80-10	3/8"	10	0.413	10.5	1.063	27.0	0.787	20.0	2.126	54.0						50
	KFO01B3	RNB80-11	7/16"	11	0.453	11.5	1.063	27.0	0.787	20.0	2.126	54.0						50
	KFO01B4	RNB80-12	1/2"	12	0.512	13.0	1.063	27.0	0.787	20.0	2.126	54.0						50
	KFO01B5	RNB80-14	9/16"	14	0.591	15.0	1.26	32.0	1.26	32.0	2.677	68.0						50
	KFO01B6	RNB80-16	5/8"	16	0.669	17.0	1.26	32.0	1.26	32.0	2.677	68.0						50
	KFO01B7	RNB80-18	11/16"	18	0.748	19.0	1.26	32.0	1.26	32.0	2.677	68.0						50
	KFO01B8	RNB80-20	3/4"	20	0.827	21.0	1.26	32.0	1.26	32.0	2.677	68.0						50
	KFO01B9	RNB80-22	7/8"	22	0.906	23.0	1.26	32.0	1.26	32.0	2.677	68.0						50
A.W.G. 4/0 100mm ²	KFO01C0	RNB100-6	1/4"	6	0.252	6.4	1.122	28.5	0.807	20.5	2.185	55.5	0.827 (21.0)	0.866 (22.0)	0.669 (17.0)	0.098 (2.5)	IZUMI EP-150A	50
	KFO01C1	RNB100-8	5/16"	8	0.331	8.4	1.122	28.5	0.807	20.5	2.185	55.5						50
	KFO01C2	RNB100-10	3/8"	10	0.413	10.5	1.122	28.5	0.807	20.5	2.185	55.5						50
	KFO01C3	RNB100-11	7/16"	11	0.453	11.5	1.122	28.5	0.807	20.5	2.185	55.5						50
	KFO01C4	RNB100-12	1/2"	12	0.512	13.0	1.122	28.5	0.807	20.5	2.185	55.5						50
	KFO01C5	RNB100-14	9/16"	14	0.591	15.0	1.26	32.0	1.26	32.0	2.717	69.0						50
	KFO01C6	RNB100-16	5/8"	16	0.669	17.0	1.26	32.0	1.26	32.0	2.717	69.0						50
	KFO01C7	RNB100-18	11/16"	18	0.748	19.0	1.26	32.0	1.26	32.0	2.717	69.0						50
	KFO01C8	RNB100-20	3/4"	20	0.827	21.0	1.26	32.0	1.26	32.0	2.717	69.0						50
	KFO01C9	RNB100-22	7/8"	22	0.906	23.0	1.26	32.0	1.26	32.0	2.717	69.0						50
A.W.G. 250/300MCM 150mm ²	KFO01D0	RNB150-8	5/16"	8	0.331	8.4	1.417	36.0	0.906	23.0	2.598	66.0	1.063 (27.0)	1.043 (26.5)	0.787 (20.0)	0.126 (3.2)	IZUMI 12#A	25
	KFO01D1	RNB150-10	3/8"	10	0.413	10.5	1.417	36.0	0.906	23.0	2.598	66.0						25
	KFO01D2	RNB150-11	7/16"	11	0.453	11.5	1.417	36.0	0.906	23.0	2.598	66.0						25
	KFO01D3	RNB150-12	1/2"	12	0.512	13.0	1.417	36.0	0.906	23.0	2.598	66.0						25
	KFO01D4	RNB150-14	9/16"	14	0.591	15.0	1.417	36.0	0.906	23.0	2.598	66.0						25
	KFO01D5	RNB150-16	5/8"	16	0.669	17.0	1.417	36.0	0.906	23.0	2.598	66.0						25
	KFO01D6	RNB150-18	11/16"	18	0.748	19.0	1.417	36.0	1.417	36.0	3.189	81.0						25
	KFO01D7	RNB150-20	3/4"	20	0.827	21.0	1.417	36.0	1.417	36.0	3.189	81.0						25
	KFO01D8	RNB150-22	7/8"	22	0.906	23.0	1.417	36.0	1.417	36.0	3.189	81.0						25
	KFO01D9	RNB150-24	15/16"	24	0.984	25.0	1.417	36.0	1.417	36.0	3.189	81.0						25
	KFO01DA	RNB150-27	1 "	27	1.102	28.0	1.417	36.0	1.417	36.0	3.189	81.0						25