


Others Connectors

| | |
|---------------------|-----------------|
| Brand | KF [®] |
| Finish/Coating | |
| Base Materials | PVC |
| Insulation Material | N/A |
| Brazed | |
| Wire/Cable Type | Regular Wire |
| Color Code | Standard |
| MOQ | 1000Pcs/item |
| Payment Terms | Based on orders |
| Delivery | FOB/CIF/DDP |



| | | | |
|----------------------------|----------|--|--|
| Spec (American AWG) | | | |
| Spec (JIS AWG) | | | |
| Spec (DIN AWG) | | | |
| Spec (GB mm ²) | | | |
| Max Current | | | |
| Max Current | | | |
| Flameproof grade | UL94 V-0 | | |

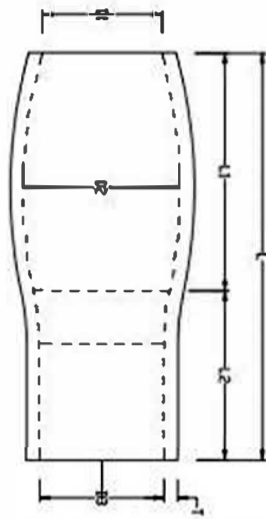

| MFG# | Dimensions Inch (mm) | | | | | | | | | | | | | | pcs/pack |
|-------------|----------------------|------|-------|------|-------|------|-------|------|-------|-----|-------|------|-------|------|----------|
| | D1 | | D2 | | D3 | | L | | T | | L1 | | L2 | | |
| V-1.25(1.5) | 0.11 | 2.8 | 0.13 | 3.3 | 0.122 | 3.1 | 0.512 | 13.0 | 0.024 | 0.6 | 0.236 | 6.0 | 0.276 | 7.0 | 1000 |
| V-2.0(2.5) | 0.13 | 3.3 | 0.177 | 4.5 | 0.146 | 3.7 | 0.551 | 14.0 | 0.028 | 0.7 | 0.276 | 7.0 | 0.276 | 7.0 | 1000 |
| V-3.5(4) | 0.165 | 4.2 | 0.224 | 5.7 | 0.161 | 4.1 | 0.669 | 17.0 | 0.031 | 0.8 | 0.354 | 9.0 | 0.315 | 8.0 | 1000 |
| V-5.5(6) | 0.189 | 4.8 | 0.224 | 5.7 | 0.205 | 5.2 | 0.669 | 17.0 | 0.031 | 0.8 | 0.354 | 9.0 | 0.315 | 8.0 | 1000 |
| V-8(10) | 0.244 | 6.2 | 0.283 | 7.2 | 0.244 | 6.2 | 0.748 | 19.0 | 0.039 | 1.0 | 0.394 | 10.0 | 0.354 | 9.0 | 500 |
| V-14(16) | 0.295 | 7.5 | 0.394 | 10.0 | 0.315 | 8.0 | 0.984 | 25.0 | 0.043 | 1.1 | 0.551 | 14.0 | 0.433 | 11.0 | 500 |
| V-22(25) | 0.413 | 10.5 | 0.472 | 12.0 | 0.374 | 9.5 | 1.181 | 30.0 | 0.047 | 1.2 | 0.591 | 15.0 | 0.591 | 15.0 | 200 |
| V-35(38) | 0.492 | 12.5 | 0.551 | 14.0 | 0.465 | 11.8 | 1.339 | 34.0 | 0.059 | 1.5 | 0.689 | 17.5 | 0.65 | 16.5 | 200 |
| V-50(60) | 0.591 | 15.0 | 0.661 | 16.8 | 0.53 | 13.5 | 1.54 | 39.0 | 0.06 | 1.5 | 0.79 | 20.0 | 0.75 | 19.0 | 100 |
| V-70(80) | 0.669 | 17.0 | 0.748 | 19.0 | 0.63 | 16.0 | 1.85 | 47.0 | 0.063 | 1.6 | 0.984 | 25.0 | 0.866 | 22.0 | 100 |
| V-95(100) | 0.748 | 19.0 | 0.866 | 22.0 | 0.71 | 18.0 | 2.13 | 54.0 | 0.07 | 1.7 | 1.18 | 30.0 | 0.95 | 24.0 | 100 |
| V-120(125) | 0.827 | 21.0 | 0.945 | 24.0 | 0.787 | 20.0 | 2.244 | 57.0 | 0.071 | 1.8 | 1.26 | 32.0 | 0.984 | 25.0 | 50 |
| V-140(150) | 0.906 | 23.0 | 0.965 | 24.5 | 0.87 | 22.0 | 2.56 | 65.0 | 0.08 | 2.0 | 1.38 | 35.0 | 1.18 | 30.0 | 50 |
| V-185(200) | 1.063 | 27.0 | 1.26 | 32.0 | 0.945 | 24.0 | 2.559 | 65.0 | 0.098 | 2.5 | 1.378 | 35.0 | 1.181 | 30.0 | 50 |
| V-240(250) | 1.142 | 29.0 | 1.496 | 38.0 | 1.043 | 26.5 | 3.031 | 77.0 | 0.098 | 2.5 | 1.378 | 35.0 | 0.165 | 4.2 | 25 |
| V-300(325) | 1.142 | 29.0 | 1.496 | 38.0 | 1.142 | 29.0 | 3.031 | 77.0 | 0.098 | 2.5 | 1.457 | 37.0 | 1.575 | 40.0 | 25 |
| V-400 | 1.535 | 39.0 | 1.732 | 44.0 | 1.457 | 37.0 | 3.386 | 86.0 | 0.098 | 2.5 | 1.85 | 47.0 | 1.535 | 39.0 | 25 |
| V-500 | 1.594 | 40.5 | 1.772 | 45.0 | 1.555 | 39.5 | 3.386 | 86.0 | 0.098 | 2.5 | 1.85 | 47.0 | 1.535 | 39.0 | 20 |
| V-600(630) | 1.85 | 47.0 | 2.047 | 52.0 | 1.772 | 45.0 | 3.622 | 92.0 | 0.098 | 2.5 | 1.89 | 48.0 | 1.732 | 44.0 | 10 |