


Non-Insulated Spade Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



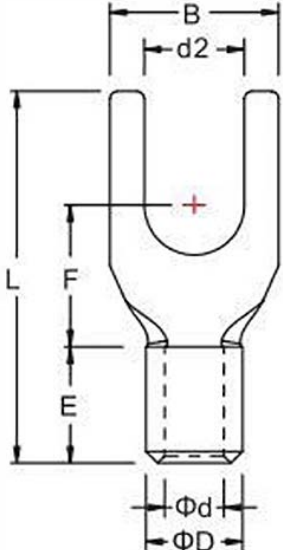

Spec(American AWG)	26-22	22-16	16-14	14-12	12-10	8	6	4
Spec(JIS AWG)	0.5	1.25	2	3.5	5.5	8	14	22
Spec(DIN AWG)	0.5	1	2.5		4.0-6.0	10	16	25
Spec(GB mm²)	0.1-0.5	0.5-1.5	2.5	4	6.0	10	16	25
Max Current		19	27	37	48.0	62	88	115





Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)								Tool	pcs/pack				
			USA	Meriç	d2		B		F		L				E	D	d	T
A.W.G. 22–20 0.2~0.5mm ³	KFO0000	SNB0.5–3	#4	3	0.087	2.2	0.205	5.2	0.256	6.5	0.488	12.4	0.197 (5.0)	0.043 (1.1)	0.079 (2.0)	0.03 (0.75)	IZUMI 5N18	1000
	KFO0001	SNB0.5–3.5	#6	3.5	0.146	3.7	0.26	6.6	0.256	6.5	0.551	14.0						1000
	KFO0002	SNB0.5–4	#8	4	0.169	4.3	0.26	6.6	0.256	6.5	0.551	14.0						1000
A.W.G. 22–16 0.5~1.5mm ²	KFO0010	SNB1.25–3	#4	3	0.126	3.2	0.217	5.5	0.256	6.5	0.63	16.0	0.197 (5.0)	0.138 (3.5)	0.079 (2.0)	0.03 (0.75)	IZUMI 5N18	1000
	KFO0011	SNBS1.25–3.5	#6	3.5	0.146	3.7	0.217	5.5	0.256	6.5	0.63	16.0						1000
	KFO0012	SNBL1.25–3.5	#6	3.5	0.146	3.7	0.256	6.5	0.256	6.5	0.63	16.0						1000
	KFO0013	SNBS1.25–4	#8	4	0.169	4.3	0.256	6.5	0.256	6.5	0.63	16.0						1000
	KFO0014	SNBM1.25–4	#8	4	0.169	4.3	0.276	7.0	0.256	6.5	0.63	16.0						1000
	KFO0015	SNBL1.25–4	#8	4	0.169	4.3	0.315	8.0	0.256	6.5	0.63	16.0						1000
	KFO0016	SNBS1.25–5	#10	5	0.209	5.3	0.315	8.0	0.256	6.5	0.63	16.0						1000
	KFO0017	SNBL1.25–5	#10	5	0.209	5.3	0.374	9.5	0.256	6.5	0.63	16.0						1000
	KFO0018	SNBS1.25–6	1/4"	6	0.252	6.4	0.374	9.5	0.256	6.5	0.63	16.0						1000
	KFO0019	SNBL1.25–6	1/4"	6	0.252	6.4	0.472	12.0	0.433	11.0	0.866	22.0						1000
A.W.G. 16–14 1.5~2.5mm ²	KFO0020	SNB2–3	#4	3	0.126	3.2	0.217	5.5	0.256	6.5	0.63	16.0	0.197 (5.0)	0.157 (4.0)	0.098 (2.5)	0.031 (0.8)	IZUMI 5N18	1000
	KFO0021	SNBS2–3.5	#6	3.5	0.146	3.7	0.217	5.5	0.256	6.5	0.63	16.0						1000
	KFO0022	SNBL2–3.5	#6	3.5	0.146	3.7	0.276	7.0	0.256	6.5	0.63	16.0						1000
	KFO0023	SNBS2–4	#8	4	0.169	4.3	0.256	6.5	0.256	6.5	0.63	16.0						1000
	KFO0024	SNBM2–4	#8	4	0.169	4.3	0.276	7.0	0.256	6.5	0.63	16.0						1000
	KFO0025	SNBL2–4	#8	4	0.169	4.3	0.315	8.0	0.256	6.5	0.63	16.0						1000
	KFO0026	SNBS2–5	#10	5	0.209	5.3	0.315	8.0	0.256	6.5	0.63	16.0						1000
	KFO0027	SNBL2–5	#10	5	0.209	5.3	0.374	9.5	0.256	6.5	0.63	16.0						1000
	KFO0028	SNBS2–6	1/4"	6	0.252	6.4	0.374	9.5	0.256	6.5	0.63	16.0						1000
	KFO0029	SNBL2–6	1/4"	6	0.252	6.4	0.472	12.0	0.433	11.0	0.866	22.0						1000
A.W.G. 14–12 2.5~4mm ²	KFO0030	SNB3.5–3	#4	3	0.126	3.2	0.217	5.5	0.276	7.0	0.728	18.5	0.236 (6.0)	0.197 (5.0)	0.118 (3.0)	0.039 (1.0)	IZUMI 5N18	1000
	KFO0031	SNB3.5–4	#8	4	0.169	4.3	0.315	8.0	0.276	7.0	0.728	18.5						1000
	KFO0032	SNB3.5–5	#10	5	0.209	5.3	0.315	8.0	0.276	7.0	0.728	18.5						1000
	KFO0033	SNB3.5–6	1/4"	6	0.252	6.4	0.472	12.0	0.354	9.0	0.846	21.5						1000
A.W.G. 12–10 4~6mm ²	KFO0040	SNB5.5–3.5	#6	3.5	0.146	3.7	0.335	8.5	0.295	7.5	0.768	19.5	0.276 (7.0)	0.217 (5.5)	0.138 (3.5)	0.039 (1.0)	IZUMI 5N18	1000
	KFO0041	SNBS5.5–4	#8	4	0.169	4.3	0.335	8.5	0.295	7.5	0.768	19.5						1000
	KFO0042	SNBL5.5–4	#8	4	0.169	4.3	0.374	9.5	0.295	7.5	0.768	19.5						1000
	KFO0043	SNB5.5–5	#10	5	0.209	5.3	0.354	9.0	0.295	7.5	0.768	19.5						1000
	KFO0044	SNBS5.5–6	1/4"	6	0.252	6.4	0.354	9.0	0.295	7.5	0.768	19.5						1000
	KFO0045	SNBL5.5–6	1/4"	6	0.252	6.4	0.472	12.0	0.472	12.0	1.004	25.5						1000
	KFO0046	SNB5.5–8	5/16"	8	0.331	8.4	0.551	14.0	0.453	11.5	0.965	24.5						1000
A.W.G. 8 8mm ²	KFO0050	SNB8–4	#8	4	0.169	4.3	0.335	8.5	0.354	9.0	0.925	23.5	0.335 (8.5)	0.276 (7.0)	0.197 (5.0)	0.047 (1.2)	IZUMI 5N18	500
	KFO0051	SNB8–5	#10	5	0.209	5.3	0.453	11.5	0.335	8.5	0.965	24.5						500
	KFO0052	SNB8–6	1/4"	6	0.252	6.4	0.453	11.5	0.335	8.5	0.965	24.5						500
	KFO0053	SNB8–8	5/16"	8	0.331	8.4	0.571	14.5	0.472	12.0	1.122	28.5						500
A.W.G. 6 14mm ²	KFO0060	SNB14–5	#10	5	0.209	5.3	0.433	11.0	0.433	11.0	1.142	29.0	0.413 (10.5)	0.354 (9.0)	0.236 (6.0)	0.055 (1.4)	OPT TP– 150D	500
	KFO0061	SNB14–6	1/4"	6	0.252	6.4	0.472	12.0	0.394	10.0	1.122	28.5						500
	KFO0062	SNB14–8	5/16"	8	0.331	8.4	0.532	13.5	0.433	11.0	1.122	28.5						500
A.W.G. 4 22mm ²	KFO0070	SNB22–8S	1/4"	6	0.252	6.6	0.512	13.0	0.433	11.0	1.22	31.0	0.472 (12.0)	0.453 (11.5)	0.315 (8.0)	0.071 (1.8)		500
	KFO0071	SNB22–8	5/16"	8	0.331	8.4	0.551	14.0	0.512	13.0	1.358	34.5						500