


Vinyl-Insulated Single Crimp (Easy Entry) Ring Terminals

Brand	KF®
Finish/Coating	Tinned
Base Materials	Copper, PVC
Insulation Material	N/A
Brazed	Seam
Wire/Cable Type	Regular Wire
Color Code	Standard
MOQ	1000Pcs/item
Payment Terms	Based on orders
Delivery	FOB/CIF/DDP



Spec (American AWG)	22-16	16-14	14-12	12-10
Spec (JIS AWG)	1.25	2	3.5	5.5
Spec (DIN AWG)	1	2.5		4.0-6.0
Spec (GB mm²)	0.5-1.5	2.5	4	6
Max Current	19	27	37	48
Operating Voltage	600V			
Temperature Withstand	75°C			

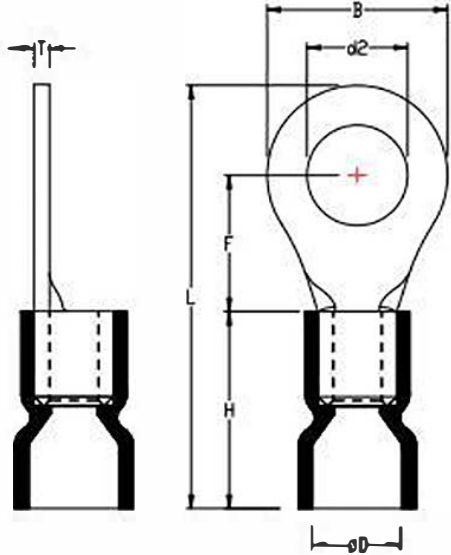

Wire Range	SKU#	MFG#	Stud Size		Dimension(mm)								Color	Tool	pcs/pack			
			USA	Meri	d2		B		F		L					H	D	T
A.W.G. 22-16 0.5~1.5mm ²	KFSE010	RVE1.25-3	#4	3	0.126	3.2	0.217	5.5	0.197	5.0	0.728	18.5	0.433 (11.0)	0.157 (4.0)	0.03 (0.75)	red	IZUMI 3#	1000
	KFSE011	RVES1.25-3.5	#6	3.5	0.146	3.7	0.217	5.5	0.197	5.0	0.728	18.5						1000
	KFSE012	RVEM1.25-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.236	6.0	0.807	20.5						1000
	KFSE013	RVES1.25-4	#8	4	0.169	4.3	0.256	6.5	0.236	6.0	0.807	20.5						1000
	KFSE014	RVEL1.25-4	#8	4	0.169	4.3	0.315	8.0	0.276	7.0	0.866	22.0						1000
	KFSE015	RVE1.25-5	#10	5	0.209	5.3	0.315	8.0	0.276	7.0	0.866	22.0						1000
	KFSE016	RVEL1.25-5	#10	5	0.209	5.3	0.394	10.0	0.315	8.0	0.945	24.0						1000
	KFSE017	RVES1.25-6	1/4"	6	0.252	6.4	0.394	10.0	0.315	8.0	0.945	24.0						1000
	KFSE018	RVE1.25-6	1/4"	6	0.252	6.4	0.453	11.5	0.433	11.0	1.102	28.0						1000
	KFSE019	RVE1.25-8	5/16"	8	0.331	8.4	0.453	11.5	0.433	11.0	1.102	28.0						1000
	KFSE01A	RVE1.25-10	3/8"	10	0.413	10.5	0.531	13.5	0.551	14.0	1.24	31.5						1000
	KFSE01B	RVE1.25-12	1/2"	12	0.512	13.0	0.748	19.0	0.551	14.0	1.437	36.5						1000
A.W.G. 16-14 1.5~2.5mm ²	KFSE020	RVE2-3	#4	3	0.126	3.2	0.256	6.5	0.177	4.5	0.768	19.5	0.453 (11.5)	0.177 (4.5)	0.031 (0.8)	blue	IZUMI 4#	1000
	KFSE021	RVES2-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.177	4.5	0.768	19.5						1000
	KFSE022	RVEM2-3.5	#6	3.5	0.146	3.7	0.256	6.5	0.236	6.0	0.827	21.0						1000
	KFSE023	RVES2-4	#8	4	0.169	4.3	0.256	6.5	0.236	6.0	0.827	21.0						1000
	KFSE024	RVEL2-4	#8	4	0.169	4.3	0.335	8.5	0.315	8.0	0.925	23.5						1000
	KFSE025	RVES2-5	#10	5	0.209	5.3	0.335	8.5	0.315	8.0	0.925	23.5						1000
	KFSE026	RVEL2-5	#10	5	0.209	5.3	0.374	9.5	0.295	7.5	0.925	23.5						1000
	KFSE027	RVE2-6	1/4"	6	0.252	6.4	0.472	12.0	0.433	11.0	1.122	28.5						1000
	KFSE028	RVE2-8	5/16"	8	0.331	8.4	0.472	12.0	0.433	11.0	1.122	28.5						1000
	KFSE029	RVE2-10	3/8"	10	0.413	10.5	0.531	13.5	0.551	14.0	1.26	32.0						1000
	KFSE02A	RVE2-12	1/2"	12	0.512	13.0	0.748	19.0	0.63	16.0	1.457	37.0						1000
	A.W.G. 14-12 1.5~2.5mm ²	KFSE030	RVE3.5-4	#8	4	0.169	4.3	0.315	8.0	0.315	8.0	1.024						26.0
KFSE031		RVES3.5-5	#10	5	0.209	5.3	0.315	8.0	0.315	8.0	1.024	26.0	1000					
KFSE032		RVEL3.5-5	#10	5	0.209	5.3	0.472	12.0	0.374	9.5	1.161	29.5	1000					
KFSE033		RVE3.5-6	1/4"	6	0.252	6.4	0.472	12.0	0.374	9.5	1.161	29.5	1000					
KFSE034		RVE3.5-8	5/16"	8	0.331	8.4	0.591	15.0	0.531	13.5	1.378	35.0	1000					
KFSE035		RVE3.5-10	3/8"	10	0.413	10.5	0.591	15.0	0.531	13.5	1.378	35.0	1000					
KFSE036		RVE3.5-12	1/2"	12	0.512	13.0	0.787	20.0	0.61	15.5	1.555	39.5	1000					
A.W.G. 12-10 4~6mm ²	KFSE040	RVE5.5-3.5	#6	3.5	0.146	3.7	0.276	7.0	0.236	6.0	0.925	23.5	0.511 (14.0)	0.256 (6.5)	0.039 (1.0)	yellow	IZUMI 5#	1000
	KFSE041	RVES5.5-4	#8	4	0.169	4.3	0.276	7.0	0.236	6.0	0.925	23.5						1000
	KFSE042	RVEL5.5-4	#8	4	0.169	4.3	0.374	9.5	0.315	8.0	1.063	27.0						1000
	KFSE043	RVE5.5-5	#10	5	0.209	5.3	0.374	9.5	0.315	8.0	1.063	27.0						1000
	KFSE044	RVE5.5-6	1/4"	6	0.252	6.4	0.472	12.0	0.413	10.5	1.201	30.5						1000
	KFSE045	RVE5.5-8	5/16"	8	0.331	8.4	0.591	15.0	0.531	13.5	1.37	34.8						1000
	KFSE046	RVE5.5-10	3/8"	10	0.413	10.5	0.591	15.0	0.531	13.5	1.37	34.8						1000
	KFSE047	RVE5.5-12	1/2"	12	0.512	13.0	0.748	19.0	0.63	16.0	1.555	39.5						1000